

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
27 December 2001 (27.12.2001)

PCT

(10) International Publication Number  
**WO 01/98603 A2**

(51) International Patent Classification<sup>7</sup>: **E04F 15/04**

(21) International Application Number: PCT/EP01/07022

(22) International Filing Date: 20 June 2001 (20.06.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2000/0397 20 June 2000 (20.06.2000) BE

(71) Applicant: **UNILIN BEHEER B.V., BESLOTEN VEN-  
NOOTSCHAP** [NL/NL]; Hoogeveenenweg 28, NL-2913  
LV Nieuwerkerk A/D IJssel (NL).

(72) Inventors: **THIERS, Bernard, Paul, Joseph**; Station-  
straat 134, B-8780 Oostrozebeke (BE). **CAPPELLE,  
Mark, Gaston, Maurits**; Cardijnlaan (STA) 8, B-8840  
Staden (BE).

(74) Agent: **DONNE, E.**; Bureau M.F.J. Bockstael NV., Aren-  
bergstraat 13, B-2000 Antwerpen (BE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DE (utility model), DK, DM, DZ, EE, ES, FI, GB,  
GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,  
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD,  
SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ,  
VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished  
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: FLOOR COVERING

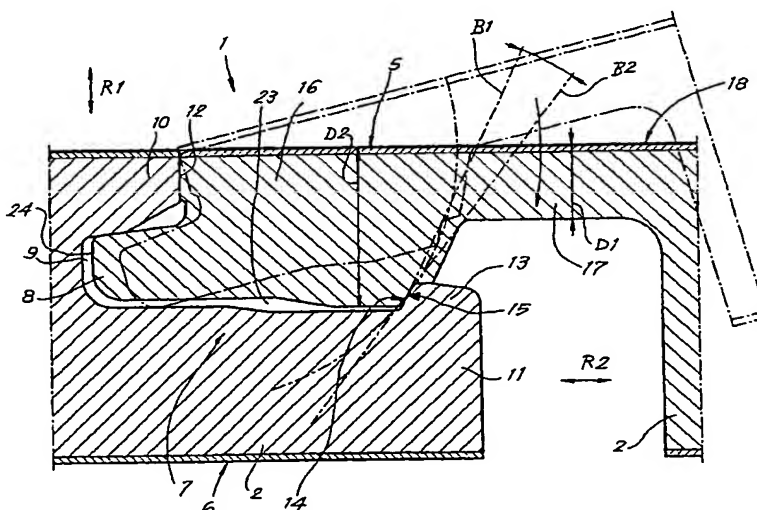

(57) Abstract: The invention concerns a floor covering consisting of hard panels (2) which are provided, at least on two opposite edges (3-4, 5-6), with coupling means (7) made in one piece with the panels (2), whereby these coupling means (7) provide for an interlocking in a direction (R1) perpendicular to the plane of the floor covering (1), as well as in a direction (R2) perpendicular to the edges (3-4, 5-6) concerned and parallel to the plane of the floor covering (1). These coupling means (7) comprise a tongue (8) and a groove (9). The lip (11) which is situated on the bottom side of the groove (9) is longer than the lip (10) on the top side. The edge (5) which is provided with the tongue (8) is made flexible.

WO 01/98603 A2

BEST AVAILABLE COPY

Floor covering.

5 The present invention concerns a floor covering, in particular of the type consisting of hard panels.

In particular, it concerns a floor covering formed of laminate panels, also called laminate parquet.

10

It is known that such laminate panels can be made of different layers. Usually, the panels are formed of boards on the basis of wood, such as chipboard or fiberboard, in particular MDF or HDF, upon which one or several layers, including a decorative layer, are provided at least on the top side. The decorative layer may be a printed paper layer, but in certain embodiments it may just as well be a layer of wood, in particular veneer. Such panels can also be made of other materials, for example merely synthetic material, or of a base plate on the basis of wood, such as chipboard, MDF or HDF and the like, upon which is provided, instead of a printed paper layer or veneer, another material such as cork, thin strips of wood and the like.

25 It is also known to couple these panels on their edges as they are laid, either by means of a conventional tongue and groove joint, whereby they are possibly glued together, either by means of a glueless coupling which provides for a mutual interlocking of the panels both in the horizontal and vertical direction, for example as described in  
30 international patent No. 97/47834.

- 2 -

The present invention aims a floor covering of hard panels, in particular laminate panels, which provides for new embodiments according to different aspects offering  
5 respective advantages.

According to a first aspect, the invention provides for a floor covering consisting of hard panels, whereby these panels are provided, at least on two opposite edges, with  
10 coupling means made in one piece with the panels, so that several of such panels can be mutually coupled, whereby these coupling means provide for an interlocking in a direction perpendicular to the plane of the floor covering, as well as in a direction perpendicular to the edges  
15 concerned and parallel to the plane of the floor covering, whereby said coupling means comprise a tongue and a groove and whereby the lip which is situated on the bottom side of the groove, hereafter called the lower lip, is longer than the lip on the top side, hereafter called the upper lip,  
20 characterized in that the edge which is provided with the tongue, is made flexible.

As the edge onto which the tongue is provided is flexible, deflections arising during the coupling of the panels are  
25 absorbed by this edge, and the above-mentioned upper lip is safeguarded against large deflections, as a result of which the material cannot possibly split due to the bending of the lower lip.

- 3 -

The lower lip is preferably even made rigid, by making it sufficiently thick, so that any bending in this lip is entirely excluded.

5 According to a first possibility, the above-mentioned flexibility is obtained by making at least the tongue flexible. According to a second possibility, which is preferably combined with the first one, and which contributes even more to the required flexibility being  
10 obtained, the tongue is situated on a part which is connected to the actual panel via a flexible zone in the shape of a local constriction.

Specific advantages of the embodiment according to the  
15 first aspect are further explained in the following detailed description.

The coupling means are preferably made such that they allow the panels to be coupled by pushing them laterally towards  
20 one another.

According to a second aspect, the invention provides for a floor covering consisting of hard panels, whereby these panels are provided with coupling means on at least two  
25 opposite edges, as a result of which several of such panels can be mutually coupled to one another, whereby these coupling means provide for an interlocking in a direction perpendicular to the plane of the floor covering, as well as in a direction perpendicular to the edges concerned, and  
30 parallel to the plane of the floor covering, whereby said coupling means comprise a tongue and a groove and whereby

- 4 -

the lip situated on the bottom side of the groove,  
hereafter called the lower lip, is longer than the lip on  
the top side, hereafter called the upper lip, characterized  
in that the coupling means consist at least of first  
5 coupling parts, formed of contact surfaces working in  
conjunction with one another, on the top side of the tongue  
and the bottom side of the upper lip respectively; second  
coupling parts formed of contact surfaces, on the top side  
of the lower lip and an opposite part of the other panel  
10 respectively; and third coupling parts providing for the  
horizontal interlocking, which are situated on the lower  
lip, yet further than the free end of the upper lip,  
whereby these third coupling parts are situated between the  
first and second ones.

15 As a result, the vertical forces which are created when  
walking over the floor covering, are divided over two  
places, which results in a better distribution of the  
forces.

20 The third coupling parts preferably consist of an inwardly  
directed contact surface provided near the free end of the  
lower lip, on this lip, and a contact surface working in  
conjunction with it which is formed on the other panel.

25 The second coupling parts preferably consist of a contact  
surface formed on the top side of the free end of the lower  
lip, as well as a contact surface working in conjunction  
with it on the bottom side of the other panel.

30

- 5 -

Moreover, a free space is preferably provided under the tongue extending as of the tip of the tongue up to the third coupling parts. As a result, the tongue can be put more easily in the groove, without having to take very  
5 precise tolerances into account.

According to a third aspect, the invention provides for a floor covering consisting of hard panels, whereby these panels are provided with coupling means on at least two  
10 opposite edges, so that several of such panels can be mutually coupled, whereby these coupling means provide for an interlocking in a direction perpendicular to the plane of the floor covering, as well as in a direction perpendicular to the edges concerned and parallel to the  
15 plane of the floor covering, whereby said coupling means comprise a tongue and a groove and whereby the lip which is situated on the bottom side of the groove, hereafter called the lower lip, is longer than the lip on the top side, hereafter called the upper lip, characterized in that the  
20 coupling means consist at least of first coupling parts formed of contact surfaces working in conjunction with one another, on the top side of the tongue and the bottom side of the upper lip respectively; second coupling parts formed of contact surfaces, on the top side of the lower lip and  
25 an opposite part of the other panel respectively; and third coupling parts which provide for the horizontal interlocking situated on the lower lip, yet further than the free end of the upper lip, whereby the second coupling parts are situated between the first and the third ones,  
30 and whereby these second coupling parts consist of contact surfaces working in conjunction with one another and

defining a local contact zone situated in the middle or practically in the middle between the tip of the tongue and the third coupling parts.

5 By making use of such a local contact zone, there remains a space between this zone and the tip of the tongue, on the bottom side of the latter, which makes sure that there is freedom of movement for the tongue when the panels are joined.

10

According to a fourth aspect, the invention provides for a floor covering consisting of hard panels, whereby these panels are provided with coupling means on at least two opposite edges made in one piece with the panels, as a  
15 result of which several of such panels can be mutually coupled to one another, whereby these coupling means provide for an interlocking in a direction perpendicular to the plane of the floor covering, as well as in a direction perpendicular to the edges concerned, and parallel to the  
20 plane of the floor covering, whereby said coupling means comprise a tongue and a groove, characterized in that the lip situated on the top side of the groove, hereafter called the upper lip, is longer than the lip situated on the bottom side of the groove, hereafter called the lower  
25 lip, and in that the above-mentioned coupling means contain coupling parts which provide for the interlocking in the horizontal direction, whereby these coupling parts consist at least of contact surfaces working in conjunction with one another, provided on the bottom side of the upper lip,  
30 outside the distal end of the lower lip, and on the opposite part of the edge of the other panel respectively.

- 7 -

As the interlocking takes place on the upper lip, it is easier to check the reliability of the interlocking while the floor is being laid than in the case where the  
5 interlocking takes place on the lower lip.

According to a fifth aspect, the invention provides for a floor covering consisting of hard panels, whereby these panels are provided with coupling means on at least two  
10 opposite edges made in one piece with the panels, as a result of which several of such panels can be mutually coupled to one another, whereby these coupling means provide for an interlocking in a direction perpendicular to the plane of the floor covering, as well as in a direction  
15 perpendicular to the edges concerned, and parallel to the plane of the floor covering, whereby said coupling means comprise a tongue and a groove, characterized in that the lip situated on the top side of the groove, hereafter called the upper lip, is longer than the lip situated on  
20 the bottom side of the groove, hereafter called the lower lip, and in that the above-mentioned coupling means contain coupling parts which provide for the interlocking in the horizontal direction, whereby these coupling parts make it possible for these panels to be mutually disconnected by  
25 turning them down with their bottom side and towards one another.

Thanks to the use of coupling means which make it possible for the panels to be disconnected by turning them downward,  
30 and preferably to be exclusively disconnectable by this movement, is obtained that such panels fit particularly



- 8 -

tight on the coupling means concerned, and are pushed even closer towards one another when being walked on.

The panels are hereby preferably rectangular, and they are  
5 provided with coupling means on two pairs of edges which make it possible for the panels to be disconnected by means of an upward rotation in order to be unlocked, whereas, on the other pair of edges, as mentioned above, they are provided with coupling means which only allow for a  
10 disconnection by turning the coupled panels with their bottom side towards one another. Also the opposite turning movements increase the guarantee that such a coupling remains always available.

15 It should be noted that in the case of longitudinal panels, the coupling means which allow for a disconnection by turning the panels upward are preferably provided on the longitudinal sides, whereas the coupling means which allow for a disconnection by turning the panels down, are  
20 preferably provided on the shortest sides.

According to a sixth aspect, the invention provides for a floor covering consisting of hard panels, whereby these panels are provided with coupling means on at least two  
25 opposite edges made in one piece with the panels, as a result of which several of such panels can be mutually coupled to one another, whereby these coupling means provide for an interlocking in a direction perpendicular to the plane of the floor covering, as well as in a direction  
30 perpendicular to the edges concerned, and parallel to the plane of the floor covering, whereby said coupling means

- 9 -

comprise a tongue and a groove, characterized in that the interlocking in the horizontal direction is at least formed of coupling parts in the shape of a local protrusion in the top side of the above-mentioned tongue, which meshes in a  
5 recess in the lip which borders the top side of the groove.

An advantage of this embodiment consists in that, since the protrusion is local, the recess can also have relatively small dimensions, and the upper lip is only weakened  
10 locally.

According to the sixth aspect, there is preferably no interlocking in the horizontal direction on the lower lip.

15 According to a seventh aspect, the invention provides for a floor covering consisting of hard panels, whereby these panels are provided with coupling means on at least two opposite edges made in one piece with the panels, as a result of which several of such panels can be mutually  
20 coupled to one another, whereby these coupling means provide for an interlocking in a direction perpendicular to the plane of the floor covering, as well as in a direction perpendicular to the edges concerned, and parallel to the plane of the floor covering, and whereby:

- 25 - the above-mentioned coupling means comprise a tongue and a groove, whereby this groove is bordered by a lip on the bottom side, the top side respectively, hereafter called the lower lip and the upper lip respectively, whereby the distal end of the upper lip defines a  
30 vertical plane, hereafter called plane V1;
- the lower lip is longer than the upper lip;

- 10 -

- there is an interlocking part on the part of the lower lip which extends past the free end of the upper lip, with a contact surface which, when coupled, works in conjunction with a contact surface which is provided on  
5 the other panel, whereby these contact surfaces form a contact zone when coupled, whose center defines a vertical plane, hereafter called plane V2;
- before the above-mentioned interlocking part, in the direction of the groove, is formed a space in the lower  
10 lip which is open on the top side;
- in the coupled situation, there is a contact zone in the cross section in which the top side of the tongue makes contact with the bottom side of the upper lip, whereby the point of this contact zone which is situated most  
15 inwardly defines a first vertical plane, hereafter called plane V3, the most outwardly situated point of this contact zone defines a second vertical plane, hereafter called plane V4, and both planes V3 and V4 define a vertical plane situated right in between,  
20 hereafter called plane V5;
- the top side of the interlocking part defines a horizontal level, hereafter called level N1;
- the bottom side of the part upon which the tongue is provided and which extends from the tip of the tongue to  
25 the interlocking zone, defines a horizontal level, hereafter called level N2;
- the levels N1 and N2 define a horizontal level situated right in between, hereafter called level N3;
- the average height of the contact zones between the top  
30 side of the tongue and the bottom side of the upper lip define a horizontal level, hereafter called level N4;

- 11 -

- the distance between the planes V1 and V2 is at least half of the distance between the levels N3 and N4; characterized in that the floor covering further provides at least in the combination of the following characteristics:
  - that the panels, and basically also the above-mentioned lips, are made of fiberboard of the type MDF or HDF;
  - that the coupling means are made such that the panels can be assembled by pushing them towards one another;
- 10 and
  - that the above-mentioned space extends to beneath the upper lip, such that this space is in conformity with at least one of the following two characteristics:
    - a) that the part of this space which is situated under the
    - 15 level N3 extends inwardly to at least past the plane V1;
    - b) that the part of this space which is situated under the level N1 extends inwardly to at least past the plane V5.

When all the above-mentioned criteria are met, an

20 embodiment is obtained according to the invention whereby the above-mentioned space is relatively large compared to the other parameters on the one hand, and, thanks to the specific application of the MDF or HDF material, the structure nevertheless remains sufficiently stable on the

25 other hand. The relatively large space which is formed in the lower lip offers the advantage that the tongue can take place in the groove more easily, as well as the advantage that the tongue can be made relatively massive.

30 According to a particular embodiment, this floor covering is characterized in that the panels are rectangular and in

that coupling means are formed on both pairs of edges which offer an interlocking in the horizontal and vertical direction, whereby these coupling means are formed as mentioned above

5 on at least one pair of said edges, and whereby on at least two edges standing at right angles to one another, use is made of a groove which is bordered by an upper lip and a lower lip respectively, whereby the lower lip each time protrudes further than the upper lip, such that two such  
10 longer lips meet in at least one angle of the panel, whereby at least the above-mentioned space continues up to the end of the panel in said angle, in other words extends through the far end of the lip standing at right angles. As the above-mentioned space is made continuous, also a  
15 large flexibility can be guaranteed in the angle concerned, as the interlocking parts of the longitudinally directed lower lip and the transversely directed lower lip are then disconnected by this continuous recess.

20 According to an eight aspect, the invention provides for a floor covering consisting of hard panels, whereby these panels are provided with coupling means on at least two opposite edges made in one piece with the panels, as a result of which several of such panels can be mutually  
25 coupled to one another, whereby these coupling means provide for an interlocking in a direction perpendicular to the plane of the floor covering, as well as in a direction perpendicular to the edges concerned, and parallel to the plane of the floor covering, and whereby:

30 - the above-mentioned coupling means comprise a tongue and a groove, whereby this groove is bordered by a lip on

- 13 -

the bottom side, the top side respectively, hereafter called the lower lip and the upper lip respectively;

- the lower lip is longer than the upper lip;
- there is an interlocking part on the part of the lower lip which extends past the free end of the upper lip, with a contact surface which, when coupled, works in conjunction with a contact surface which is provided on the other panel; and
- before the above-mentioned interlocking part, in the direction of the groove, is formed a space in the lower lip which is open on the top side;

characterized in that the coupling means are made such that the panels can be assembled by pushing them towards one another, and in that in the bottom side of the part onto which the tongue is provided, and which extends from the tip of the tongue up to the interlocking zone, is provided an excavation, such that this excavation co-operates with the interlocking part in a position in which the tongue is situated in front of the groove. Thus is obtained that, while the tongue is being fit in, something as if it were falls down at the time when the interlocking part takes place in the excavation, so that, next, the tongue is better positioned in front of the groove of the other panel.

The floor coverings consisting of hard panels known until now, and which allow for a glueless interlocking, do not make it possible to temporarily remove panels from the middle of the floor covering after the floor covering has been entirely laid. This is disadvantageous in that it is difficult to replace damaged panels, as well as impossible

- 14 -

to locally remove the floor covering, for example to work on or in the rough floor, to lay or remove cables under the floor covering, etc. With the known systems, the panels always need to be systematically removed as of an edge of the floor covering.

Also, according to a ninth aspect, the invention aims a floor covering made of hard panels, whereby it is possible to remove any panel whatsoever from an existing floor covering, and to put it back, without the floor covering having to be systematically broken up as of an edge of the whole.

According to this ninth aspect, the invention to this end provides for a floor covering consisting of hard panels, whereby these panels are provided with coupling means on at least two opposite edges made in one piece with the panels, as a result of which several of such panels can be mutually coupled to one another, whereby these coupling means provide for an interlocking in a direction perpendicular to the plane of the floor covering, as well as in a direction perpendicular to the edges concerned, and parallel to the plane of the floor covering, whereby the above-mentioned coupling means are made such that two coupled panels, starting from a flat position, can be turned towards one another with their bottom sides over at least a certain angle on the one hand, and this turning movement makes it possible for said two panels to be removed from in between adjacent panels on the other hand.

30

- 15 -

According to a first preferred embodiment, the coupling means are made such that they make it possible for the two panels, when they are situated in a floor covering, to be lifted with their coupled edges, such that there is a  
5 disconnection on at least one of the opposite edges providing for a connection with the adjacent panels.

According to a second preferred embodiment, the coupling means are made such that they make it possible for the two  
10 panels, when they are situated in a floor covering, to be lifted with their coupled edges, such that the coupling, in particular the vertical coupling, is interrupted on the edges concerned and a disconnection becomes possible.

15 According to a particularly practical embodiment, the floor covering is characterized in that the coupling means mainly consist of a tongue and a groove, whereby the lip which is situated on the bottom side of the groove is longer than the lip on the top side, and the interlocking is obtained  
20 mainly in the horizontal direction thanks to an interlocking part on the lip situated on the bottom side of the groove and an interlocking part working in conjunction with it on the bottom side of the other panel, whereby these coupling means make it possible for the panels to be  
25 assembled by means of a turning movement and whereby, in the coupled position, spaces are provided above the first-mentioned interlocking part as well as under the second-mentioned interlocking part which allow for a further turning movement.

30



The above-described nine aspects of the invention may occur as separate or they can be mutually combined, in any possible combination, provided the embodiments as described according to the above-mentioned nine aspects do not have  
5 any contradictory qualities.

Naturally, the invention also concerns panels with which the above-described floor coverings can be made.

10 In order to better explain the characteristics of the invention, the following preferred embodiments are described as an example only without being limitative in any way, with reference to the accompanying drawings, in which:

15

figure 1 schematically represents a hard panel;

figure 2 schematically represents a part of a floor covering made of hard panels;

figure 3 represents an embodiment of coupling means  
20 applied in a floor covering according to the invention, seen from a section which corresponds for example to section III-III in figure 2;

figure 4 represents a section according to line IV-IV in figure 2;

25 figure 5 represents a variant of figure 4;

figures 6 to 8 represent the coupling means from figure 3 in different positions;

figure 9 represents a variant of the coupling means from figure 3;

30 figure 10 represents another variant;

- 17 -

figures 11 to 13 represent the variant from figure 10  
in different positions;  
figure 14 represents another variant;  
figure 15 represents yet another variant;  
5 figures 16 and 17 represent the coupling means from  
figure 15 in two other positions;  
figure 18 represents an angular part of a panel  
according to the invention;  
figure 19 represents a section of another embodiment  
10 according to the invention;  
figure 20 represents a section of another embodiment  
of a floor covering according to the invention;  
figure 21 represents the part indicated by F21 in  
figure 20 to a larger scale;  
15 figure 22 represents how the panels of the floor  
covering from figure 20 can be disconnected, connected  
respectively;  
figure 23 represents the part indicated by F23 in  
figure 22 to a larger scale;  
20 figure 24 represents a view analogous to that in  
figure 21 for another variant;  
figure 25 represents how the panels of figure 24 can  
be mutually disconnected, connected respectively;  
figure 26 represents the part indicated by F26 in  
25 figure 25 to a larger scale.

As represented in figures 1 and 2, the invention concerns a  
floor covering 1, as well as the hard panels 2 of which  
such a floor covering 1 is made.

30

- 18 -

As described in international patent application No. 97/47834, it is known that such panels 2 can be connected without any glue being required by making use of coupling means which, when the panels 2 are rectangular, provide for an interlocking in a direction R1, perpendicular to the plane of the floor covering 1, at least on one pair of opposite edges 3-4, and preferably on both pairs of edges 3-4, 5-6 respectively, as well as in a direction R2 perpendicular to the edges 3-4 or 5-6 concerned, and parallel to the plane of the floor covering 1.

Coupling means can be used hereby which allow for different coupling methods, but preferably a coupling by rotating as well as by pushing the panels together. The latter makes it possible for such panels 2 to be coupled to one another in a known manner by first rotating them into one another on their edges 3-4, as represented by means of the panel 2A in figure 2 with a movement of rotation W1, and by subsequently snapping them together on their edges 5-6 by means of a translation T1. According to a variant, the connection on the edges 3-4 of the panels 2 concerned, can also be realized by starting from a position as is schematically indicated by reference 2B, and by coupling the panel 2 concerned by means of a translation T2.

Also, while a panel 2A is maintained in the rotated position, a following panel 2C can be coupled to the edges 5 and 6 concerned, either by means of a translation T3, or by means of a mutual rotation between the panels 2A and 2C, after which both panels 2A and 2C are then turned down so as to be locked to the preceding row of panels.

- 19 -

As mentioned in the introduction, the present invention aims different new embodiments of coupling means to mutually connect such panels 2.

5

Figure 3 represents an embodiment according to the above-mentioned first aspect of the invention.

Also, in this embodiment, the floor covering 1 consists of  
10 hard panels 2 which are provided with coupling means 7 made in one piece with the panels 2 on at least two opposite edges, in this case 5-6, so that several of such panels 2 can be mutually connected to one another. These coupling means 7 provide for an interlocking in the direction R1, as  
15 well as R2.

Further, these coupling means 7 have a tongue 8 provided on the edge 5, and a groove 9 provided on the edge 6, in which the tongue 8 fits. The groove 9 is hereby bordered on the  
20 top side by means of a lip 10, hereafter called the upper lip. At the bottom, it is bordered by a lip 11, hereafter called the lower lip, which is longer than the top lip 10, in other words, which extends further than the distal end 12 of the lip 10 in the horizontal direction.

25

The interlocking in the direction R2 is obtained as the lower lip 11 forms an interlocking part 13 with an inwardly directed contact surface 14 which can co-operate with an opposite contact surface 15 formed on the edge 5 when being  
30 coupled.

According to the invention, the edge 5 which is provided with the tongue 8 is made flexible, whereas the lip 11 is preferably made rigid, the latter by making it relatively thick, as is clearly visible in figure 3.

5

The edge 5 is made such that it can bend in several places. Thus, for example, the tongue 8 is flexible, but even more important is that this tongue 8 is preferably situated on a part 16, as represented, which is connected to the actual  
10 panel 2 via a flexible zone 17 in the shape of a local constriction.

This flexible zone 17 is preferably situated on the place as indicated in figure 3, in other words seen as of the  
15 tongue 8, past the contact surface 15, and said flexible zone 17 has a thickness D1, according to the direction R1, which is smaller than half the thickness of the panels 2 and/or smaller than 2/3 of the thickness D2 of the part 16 upon which the tongue 8 is situated.

20

If the panels 2 are made of fiberboard, of the type MDF or HDF, the thickness D1 is preferably even smaller than 3 mm, and better still smaller than 2 mm.

25 The flexible zone 17 is situated against the top side 18 of the panel 2 concerned, which is particularly useful when MDF or HDF board is used, as such materials have a larger density on the outer surfaces, and thus the thickness on these places can be maximally reduced so as to obtain an  
30 optimal flexibility.

- 21 -

Apart from the advantages already mentioned in the introduction, the invention according to the first aspect also offers the following advantageous characteristics:

- 5    - As the contact surface 14 is situated relatively high, said contact surface 14 can be provided in a more vertical position, without much deviation from the tangential directions P1 and P2 represented in figure 3. Thus is obtained a solid interlocking.
- 10   - As the flexibility of the connection is situated in the top side of the panel, this results in the interlocking being pulled even more tightly together when a tensile force is exerted on the panels.
- 15   - In the design of figure 3 is created a stress concentration on the top side of the panel 2, right behind the tongue 8, which results in a bending. As a consequence, the stress concentration is transferred to the strongest place of the board. During the joining, it is practically impossible for forces to be created in  
20   the deepest point of a groove 9, so that it is almost excluded that splits are created at this deepest point.

According to the above-mentioned second aspect of the invention, which in the given example of figure 3 is  
25   combined with the above-mentioned first aspect, the coupling means 7 consist at least of first coupling parts formed of contact surfaces 19-20 working in conjunction with one another, on the top side of the tongue 8 and the bottom side of the upper lip 10 respectively; second  
30   coupling parts formed of contact surfaces 21-22, on the top side of the lower lip 11 and the opposite part 16 of the

- 22 -

other panel 2 respectively; and third coupling parts which provide for the horizontal interlocking situated on the lower lip 11, but further than the free end 12 of the upper lip 10, formed of the above-mentioned contact surfaces 14 and 15. What is special here, is that the third coupling parts are situated between the first and the second ones.

The second coupling parts are preferably situated immediately next to the third coupling parts. The contact surface 21 is hereby formed of the top side of the above-mentioned interlocking part 13, whereas the contact surface 22 is situated precisely opposite to it.

According to the embodiment of figure 3, there is a free space 23 under the tongue 8 which extends as of the tip 24 of the tongue 8 up to the third coupling parts, in other words the contact surface 14.

The coupling means 7 are mainly designed to be provided on one pair of edges 5-6, whereas coupling means 25 are preferably provided on the other edges 3-4, as represented in figure 4 or figure 5, which are described in international patent application No. 97/47834 and which make it possible for the panels 2 concerned to be assembled along their top edges, disassembled respectively, at least by means of a movement of rotation. In the case where the panels 2, as represented, are longitudinal, the coupling means 7 will preferably be provided on the short edges 5-6.

What precedes does not prevent, however, that the coupling means 7 are provided on both pairs of edges 3-4 and 5-6, or

- 23 -

on the longitudinal edges 3-4, whereas another connection is provided for on the short edges.

Nor is it excluded to provide the panels 2 on merely one  
5 pair of edges with coupling means, in this case the coupling means 7.

Further, the coupling means 7 are preferably made such that the panels 2 with their edges concerned, in this case the  
10 edges 5 and 6, can be connected to one another by pushing the panels 2 freely towards one another, as is represented step by step in figures 6 to 8, and as will be further described into more detail. Moreover, the coupling means 7 are made such that the edges concerned, in this case the  
15 edges 5 and 6, can also be connected to one another by means of a movement of rotation, disconnected respectively, as is represented by means of a dot and dash line in figure 3.

20 The laying of the floor covering 1, with panels 2 containing coupling means 7, can then for example, yet not necessarily, be carried out as follows. In a situation as represented in figure 2, the panel 2A is first connected with its edge 3 to an edge 4 of already laid panels by  
25 presenting the panel 2A at an angle and by rotating the above-mentioned edges 3-4 into one another, so that a connection such as for example in figure 4, or, as an alternative, figure 5, is created.

30 Then, the panel 2A can be connected to the preceding panel with a translation T1, whereby the situations as



- 24 -

represented in figures 6 to 8 are successively witnessed on the coupling means 7. It is clear that this is accompanied by a bending in the tongue 8, and to a larger extent also in the flexible zone 17, whereby the part 16 with the  
5 contact surface 15 finally snaps down behind the contact surface 14.

Figure 9 represents an embodiment which is realized according to the above-mentioned third aspect of the  
10 invention. The coupling means 26 used hereby represent first coupling parts analogous to the coupling means 7, formed by contact surfaces 19 and 20, and third coupling parts formed by contact surfaces 14 and 15. What is special hereby, is that the above-mentioned second coupling  
15 parts are situated between the first and third ones, and that the second coupling parts consist of contact surfaces 27-28 working in conjunction with one another and which define a local contact zone 29 which is situated in the middle or practically in the middle between the tip 24 of  
20 the tongue 8 and the third coupling parts, in other words the contact surface 14.

As represented in figure 9, a bulge 30 can be provided in the lower lip 11 on the contact zone 29.

25

Figures 10 to 13 represent an embodiment for different positions with coupling means 31 which are in conformity with the above-mentioned fourth aspect of the invention. The upper lip 10 is hereby longer than the lower lip 11,  
30 and the coupling means 25 which realize the interlocking in the horizontal direction consist of coupling parts formed

of contact surfaces 32-33 working in conjunction with one another, which are provided on the bottom side of the upper lip 10, outside the distal end of the lower lip 11, and on the opposite part of the edge of the other panel 2 respectively.

The coupling means 31 are hereby made such that the connection can be realized by pushing the panels 2 towards one another with the edges 5-6 concerned, for example over a base, whereby they systematically fit into one another, as represented in figures 10 to 12.

As shown in the figures, the tongue 8 has one end 34 which has been made thinner. There is also a free space 35 between the free end 36 of the lower lip 11 and the opposite part 37 under the tongue 8 of the other panel 2.

The embodiment of figures 10 to 13 also illustrates the fifth aspect of the invention, in other words that the edges, in this case the edges 5-6, are provided with coupling means 31 which make it possible for the panels 2 concerned to be mutually disconnected by rotating them with their bottom sides 38 down and towards one another, as is specifically shown in figure 13. The above-mentioned space 35 is helpful thereby.

The embodiment of figures 10 to 13 also corresponds to the sixth aspect of the invention, characterized in that the interlocking in the horizontal direction is formed of coupling parts in the shape of a local protrusion 39 in the

top side 40 of the above-mentioned tongue 8, which meshes in a recess 41 in the upper lip 10.

Figure 14 represents a variant which also applies the  
5 above-mentioned characteristics of the sixth aspect of the invention.

Other particularities of this embodiment, which must not all be combined according to variants which are not  
10 represented, consist in that the top side 40 of the tongue 8, with the exception of the local protrusion 39, is mainly parallel to the surface of the floor covering 1, and in that the bottom side 42 of the tongue 8 is mainly formed of a smoothly bent surface which reaches up to the top side 40  
15 of the tongue 8. Also this embodiment makes it possible for the panels 2 to be assembled by means of a mainly horizontal movement.

Figure 15 represents a connection with coupling means 43  
20 realized according to the above-mentioned seventh aspect of the invention. It concerns a connection whereby:

- the coupling means 43 comprise a tongue 8 and a groove 9, whereby this groove 9 is bordered on the bottom side, the top side respectively, by a lip, hereafter called  
25 the lower lip 11 and the upper lip 10 respectively, whereby the distal end 12 of the upper lip 10 defines a vertical plane, hereafter called plane V1;
- the lower lip 11 is longer than the upper lip 10;
- there is an interlocking part 13 on the part of the  
30 lower lip 11 which extends past the free end 12 of the upper lip 10, with a contact surface 14 which, when

- 27 -

- coupled, works in conjunction with a contact surface 15 which is provided on the other panel 2, whereby these contact surfaces 14-15 form a contact zone when coupled, whose center M1 defines a vertical plane, hereafter
- 5 called plane V2;
- before the above-mentioned interlocking part 13, in the direction of the groove 9, is formed an open space 44 in the lower lip 11 which is open on the top side;
  - in the coupled situation, there is a contact zone in the

10 cross section in which the top side of the tongue 8 makes contact with the bottom side of the upper lip 10, whereby the point C3 of this contact zone which is situated most inwardly defines a first vertical plane, hereafter called plane V3, the most outwardly situated

15 point C4 of this contact zone defines a second vertical plane, hereafter called plane V4, and both planes V3 and V4 define a vertical plane situated right in between, hereafter called plane V5;

  - the top side of the interlocking part 13 defines a

20 horizontal level, hereafter called level N1;

  - the bottom side of the part 16 upon which the tongue 8 is provided and which extends from the tip 24 of the tongue 8 to the interlocking zone, defines a horizontal level, hereafter called level N2;

25 - the levels N1 and N2 define a horizontal level situated right in between, hereafter called level N3;

  - the average height of the contact zone between the top side of the tongue 8 and the bottom side of the upper lip 10 define a horizontal level, hereafter called level

30 N4;

- 28 -

- the distance between the planes V1 and V2 is at least half of the distance between the levels N3 and N4.

This floor covering 1 is special in that it provides at least in the combination of the following characteristics:

- that the panels 2, and basically also the above-mentioned lips 10-11, are made of fiberboard of the type MDF or HDF;
- that the coupling means 43 are made such that the panels 2 can be assembled by pushing them towards one another; and
- that the above-mentioned space 44 extends to beneath the upper lip 10, such that this space 44 is in conformity with at least one of the following two characteristics:
  - a) that the part of this space 44 which is situated under the level N3 extends inwardly to at least past the plane V1;
  - b) that the part of this space 44 which is situated under the level N1 extends inwardly to at least past the plane V5.

Thanks to this specific combination is obtained a space 44 which acts as an excavation in relation to the other dimensions extending over a relatively large distance in the direction R2, as a result of which the advantages mentioned in the introduction are obtained. In spite of the relatively large excavation and, consequently, the fact that the lower lip 11 is relatively thin, the rigidity remains nevertheless sufficient thanks to the use of MDF or HDF as a base material, which has a layered fibrous structure.

The distance between the levels N1 and N2 is preferably smaller than 1/3 of the distance between the levels N2 and N4. Thus, the obstruction formed by the interlocking part  
5 13 while the panels are being pushed together, is restricted to a minimum, as a result of which the panels 2 can smoothly slide into one another.

Further, the intersection P4 between the plane V4 and the  
10 bottom side of the tongue 8 is situated beneath level N1, seen from a cross section, and better still beneath level N3. The tongue 8 thus obtains a relatively large thickness, which improves its rigidity. Further, it is even more indicated for the section P5 between the plane V5  
15 and the bottom side of the tongue 8 to be situated beneath level N1, and better still beneath level N3.

In particular, the section P3 between the plane V3 and the bottom side of the tongue 8 will be situated beneath level  
20 N1, and better still beneath level N3.

According to a preferred characteristic of the invention, the part of the above-mentioned space 44 situated under the plane N3 extends at least inwardly up to the vertical plane  
25 V6 which is determined by the tip 24 of the tongue 8.

In the case where the panels 2 are rectangular and coupling means are formed on both pairs of edges 3-4 and 5-6 which provide for a vertical and a horizontal interlocking,  
30 whereby both edges 4 and 6 have a lower lip 11, 11A respectively, which is longer than the upper lip 11, at

- 30 -

least the above-mentioned space 44 is preferably made continuous up to the end of the panel 2, as represented in figure 18, in the angle 45, in other words it extends through the far end of the square lip 10A, in particular  
5 the interlocking part 13A thereof. As the space 44 is relatively large on the one hand, and this space 44 extends through the interlocking part 13A on the other hand, and the interlocking parts 13 and 13A are disconnected from one another, a particularly flexible angle is obtained, which  
10 makes it easier to assemble the panels.

Figure 19 illustrates the above-mentioned eighth aspect of the invention, whereby an excavation 46 is provided in the bottom side of the tongue 8, such that in the mutual  
15 position of the two panels 2 as represented in figure 19, the tongue 8 is better positioned in front of the groove.

It should be noted that in all the above-mentioned embodiments, the contact surfaces providing for the  
20 horizontal interlocking are preferably directed slantingly in relation to the plane of the floor covering 1. This does not exclude, however, that according to a variant, one or both contact surfaces can also be directed perpendicular to the plane of the floor covering. The contact surfaces  
25 can also be bent as such, whereby the tangent line in the middle of the contact zone determines the above-mentioned gradient.

In the case where these contact surfaces, or their tangent  
30 line, are directed slantingly, they preferably extend in a direction which is tangential or almost tangential to a

- 31 -

circle, whose center is situated on a point of rotation around which the panels 2 can be turned apart. As indicated in figure 3, this means that the gradient or direction B1 of the contact surfaces deviates only little  
5 from the gradient of the tangent B2 onto the circle C.

In order to provide for a snap-in effect, the direction B1 pertaining to the contact surfaces preferably does deviate from the direction of the above-mentioned tangent B2 and is  
10 directed inwardly, such that a snap-in effect is created when the panels are rotated into one another, whereby the above-mentioned direction B1 deviates  $30^\circ$  at the most from the above-mentioned tangential direction B2.

15 What precedes can be applied in all the rotatable embodiments described above, also in the embodiments whereby the panels 2 are rotated apart by turning them down.

20 The coupling means which are realized according to one or several of the first eight aspects of the invention are all particularly suitable to be provided on edges 3-4 and/or 5-6, whereby it must be possible to assemble the panels 2 by shifting them.

25

In the case where the panels 2 are rectangular, in other words square or longitudinal, they are preferably provided with coupling parts on all four edges 3-4 and 5-6 which allow for a vertical and a horizontal interlocking, whereby  
30 coupling means as described in one or several of the above-



- 32 -

mentioned first eight aspects are then provided on at least two opposite edges 3-4 or 5-6.

In the case where the panels 2 are rectangular, the new  
5 coupling means are preferably provided at least on the short edges 5-6. Further, coupling means are then preferably provided on the long edges 3-4 which allow for an assembly, disassembly respectively by means of a movement of rotation, which can be of a known nature or  
10 which can also be made according to any of the above-mentioned eight aspects.

Figures 20 to 23 show an embodiment according to the ninth aspect of the invention. According to this ninth aspect,  
15 it concerns a floor covering 1, consisting of hard panels 2, whereby these panels 2 are provided on at least two opposite edges, in the case of elongated panels 2 preferably on the longitudinal edges 3-4, with coupling means 7 made in one piece with the panels 2, so that  
20 several of such panels 2 can be mutually connected to one another, whereby these coupling means 7 provide for an interlocking in a direction R1, perpendicular to the plane of the floor covering 1, as well as in a direction R2 perpendicular to the edges 3-4 concerned, and parallel to  
25 the plane of the floor covering 1, whereby the above-mentioned coupling means 7 are made such that two connected panels 2 can be turned towards one another with their bottom side, starting from a flat position, over at least a certain angle on the one hand, whereby this turning  
30 movement makes it possible for the two above-mentioned

- 33 -

panels 2 to be removed from between other adjacent panels 2D and 2E on the other hand.

Moreover, according to the embodiment of figures 20 to 23,  
5 the coupling means 7 are made such that, as represented in figure 22, they make it possible for the two panels 2 to be lifted with their coupled edges 3-4, from a flat position, such that there is a disconnection on at least one of the opposite edges which provide for the connection with the  
10 adjacent panels 2D and 2E. Thus, the panels 2 can be removed from an existing floor covering 1 by first lifting them as mentioned above and by subsequently turning the left panel 2 from figure 22 up, as represented by means of a dot and dash line, so that the left panel 2 of figure 22  
15 can be removed. Next, also the right panel 2 can be removed. The initial lifting of the panels 2 can take place in any way whatsoever, for example by means of a suction cup or by sticking a hook or such through an opening made in the floor covering, for example a bore  
20 hole.

Figures 20 to 26 represent variants whereby the coupling means 7 are made such that they make it possible for the two panels 2 to be lifted, from a flat position, with their  
25 coupled edges 3-4, such that the connection, in particular the vertical connection on the edges 3-4 concerned is undone. In this case, it is not necessary to disconnect the panels 2D and/or 2E first in order to disconnect the two panels 2.

Both in the embodiment of figures 20 to 23 and in the one of figures 24 to 26, the coupling means 7 mainly consist of a tongue 8 and a groove 9, whereby the lip 11 which is situated on the bottom side of the groove 9 is longer than the lip 10 on the top side, and the interlocking is mainly obtained in the horizontal direction by means of an interlocking part 13 on the lip 11 and an interlocking part 47 on the bottom side of the other panel 2 working in conjunction with it, whereby these coupling means 7 make it possible for the panels 2 to be assembled by means of a turning movement, and whereby, in the coupled position, there are spaces 48-49 above the first-mentioned interlocking part 13, as well as under the second-mentioned interlocking part 47, which allow for a further turning.

Practically, the above-mentioned interlocking parts 13-47 are positioned such that a lateral play S is created during the above-mentioned further turning, as is schematically represented in figure 21, so that a certain freedom of movement is obtained which is desirable in order to remove the panels 2 from between the fixed panels 2D and 2E.

In the embodiment of figures 24 to 26, this lateral play S, as well as the design of the tongue 8 and the groove 9, are selected such that the right panel 2, in the situation of figure 26, comes loose so to say and can simply be removed from the left panel 2.

In particular, the distance Z1 between the tip of the tongue 8 and the interlocking part 47 situated on the same edge is smaller than or equal to the distance Z2 between

the tip of the lip 10 bordering the top side of the groove 9 and the interlocking part 13 situated on the lip 11 bordering the bottom side of the groove 9.

- 5 It should be noted that in the embodiments of figures 20 to 26, the tongue 8 is preferably made such that it can make a movement of rotation in the groove 9, as said tongue 8 is more or less round, as represented in figures 20 to 23, or because it is relatively short, as represented in figures  
10 24 to 26.

As represented, coupling means are preferably provided both on the short edges and on the longitudinal edges which allow for an interlocking both in the vertical and in the  
15 horizontal direction, whereby they can all be made such that they allow for a connection and disconnection as described above by means of figures 20 to 26. It is also possible to apply the coupling means represented in these figures only on the longitudinal edges, whereas coupling  
20 means with another shape are applied on the short sides, for example as represented in figure 4.

The invention is by no means limited to the above-described embodiments represented in the accompanying drawings; on  
25 the contrary, such a floor covering can be made in different shapes and dimensions while still remaining within the scope of the invention.

Claims.

- 5 1. Floor covering consisting of hard panels (2), whereby these panels (2) are provided, at least on two opposite edges (3-4, 5-6), with coupling means (7) made in one piece with the panels (2), so that several of such panels (2) can be mutually coupled, whereby these  
10 coupling means (7) provide for an interlocking in a direction (R1) perpendicular to the plane of the floor covering (1), as well as in a direction (R2) perpendicular to the edges (3-4, 5-6) concerned and parallel to the plane of the floor covering (1), whereby  
15 the above-mentioned coupling means (7) comprise a tongue (8) and a groove (9) and whereby the lip (11) which is situated on the bottom side of the groove (9) is longer than the lip (10) on the top side, characterized in that the edge (5) which is provided with the tongue (8), is  
20 made flexible.
2. Floor covering according to claim 1, characterized in that the lip (11) which is situated on the bottom side of the groove (9) is made rigid.
- 25 3. Floor covering according to claim 1 or 2, characterized in that at least the tongue (8) is made flexible.
4. Floor covering according to any of the preceding claims,  
30 characterized in that the tongue (8) is situated on a part (16) which is connected to the actual panel (2) via

- 37 -

a flexible zone (17) in the shape of a local constriction.

- 5 5. Floor covering according to claim 4, characterized in that the flexible zone (17) has a thickness (D1), according to the direction (R1) perpendicular to the plane of the floor covering (1), which is smaller than half the thickness of the panels (2).
- 10 6. Floor covering according to claim 4 or 5, characterized in that the flexible zone (17) has a thickness (D1), according to a direction perpendicular to the plane of the floor covering (1), which is smaller than  $\frac{2}{3}$  of the thickness (D2) of the part (16) upon which the tongue  
15 (8) is situated.
7. Floor covering according to any of claims 4 to 6, characterized in that the panels (2) are made of fiberboard, of the type MDF or HDF, and in that the  
20 flexible zone (17) has a thickness (D1) of less than 3 mm, and better still of less than 2 mm.
8. Floor covering according to any of claims 4 to 7, characterized in that the flexible zone (17) is situated  
25 on the top side (18) of the panel (2).
9. Floor covering consisting of hard panels (2), whereby these panels (2) are provided, at least on two opposite edges (3-4, 5-6), with coupling means (7), so that  
30 several of such panels (2) can be mutually coupled, whereby these coupling means (7) provide for an

- 38 -

interlocking in a direction (R1) perpendicular to the plane of the floor covering (1), as well as in a direction (R2) perpendicular to the edges (3-4, 5-6) concerned and parallel to the plane of the floor covering (1), whereby the above-mentioned coupling means (7) comprise a tongue (8) and a groove (9) and whereby the lip (11) which is situated on the bottom side of the groove (9), hereafter called the lower lip (11), is longer than the lip (10) on the top side, hereafter called the upper lip (10), characterized in that the coupling means (7) consist at least of first coupling parts, formed of contact surfaces (19-20) working in conjunction with one another, on the top side of the tongue (8) and the bottom side of the upper lip (10). respectively; second coupling parts formed of contact surfaces (21-22), on the top side of the lower lip (11) and an opposite part of the other panel (2) respectively; and third coupling parts providing for the horizontal interlocking, which are situated on the lower lip (11), yet further than the free end (12) of the upper lip (10), whereby these third coupling parts are situated between the first and second ones.

10. Floor covering according to claim 9, characterized in that the third coupling parts consist of an inwardly directed contact surface (14) provided near the free end of the lower lip (11), on this lip (11), and a contact surface (15) working in conjunction with it which is formed on the other panel (2).

11. Floor covering according to claim 10, characterized in that the second coupling parts consist of a contact surface (21) formed on the top side of the free end of the lower lip (11), as well as a contact surface (22) working in conjunction with it on the bottom side of the other panel (2).
12. Floor covering according to any of claims 9 to 11, characterized in that a free space (23) is provided under the tongue (8) extending as of the tip (24) of the tongue (8) up to the third coupling parts (14-15).
13. Floor covering consisting of hard panels (2), whereby these panels (2) are provided with coupling means on at least two opposite edges (3-4, 5-6), so that several of such panels can be mutually coupled, whereby these coupling means provide for an interlocking in a direction perpendicular to the plane of the floor covering (1), as well as in a direction perpendicular to the edges concerned and parallel to the plane of the floor covering, whereby said coupling means comprise a tongue and a groove and whereby the lip which is situated on the bottom side of the groove, hereafter called the lower lip (11), is longer than the lip on the top side, hereafter called the upper lip (10), characterized in that the coupling means consist at least of first coupling parts formed of contact surfaces working in conjunction with one another, on the top side of the tongue (8) and the bottom side of the upper lip (10) respectively; second coupling parts formed of contact surfaces, on the top side of the lower lip (11)



- 40 -

and an opposite part of the other panel respectively;  
and third coupling parts which provide for the  
horizontal interlocking situated on the lower lip, yet  
further than the free end of the upper lip, whereby the  
5 second coupling parts are situated between the first and  
the third ones, and whereby these second coupling parts  
consist of contact surfaces working in conjunction with  
one another and defining a local contact zone situated  
in the middle or practically in the middle between the  
10 tip (24) of the tongue (8) and the third coupling parts.

14. Floor covering according to claim 13, characterized in  
that the lower lip (11) has a protuberance (30) on the  
contact zone (29).

15

15. Floor covering consisting of hard panels, whereby these  
panels are provided with coupling means on at least two  
opposite edges made in one piece with the panels, as a  
result of which several of such panels can be mutually  
20 coupled to one another, whereby these coupling means  
provide for an interlocking in a direction perpendicular  
to the plane of the floor covering, as well as in a  
direction perpendicular to the edges concerned, and  
parallel to the plane of the floor covering, whereby  
25 said coupling means comprise a tongue (8) and a groove  
(9), characterized in that the lip situated on the top  
side of the groove (9), hereafter called the upper lip  
(10), is longer than the lip situated on the bottom side  
of the groove (9), hereafter called the lower lip (11),  
30 and in that the above-mentioned coupling means contain  
coupling parts which provide for the interlocking in the

- 41 -

horizontal direction, whereby these coupling parts consist at least of contact surfaces working in conjunction with one another, provided on the bottom side of the upper lip (10), outside the distal end of the lower lip, and on the opposite part of the edge of the other panel respectively.

16. Floor covering according to claim 15, characterized in that the tongue (8) has one end (34) which has been made thinner.

17. Floor covering according to claim 15 or 16, characterized in that there is a free space (35) between the free end (36) of the lower lip (11) and the opposite part (37) under the tongue (8) of the other panel (2).

18. Floor covering consisting of hard panels (2), whereby these panels (2) are provided with coupling means on at least two opposite edges made in one piece with the panels, as a result of which several of such panels can be mutually coupled to one another, whereby these coupling means provide for an interlocking in a direction (R1) perpendicular to the plane of the floor covering (1), as well as in a direction (R2) perpendicular to the edges concerned, and parallel to the plane of the floor covering (1), whereby said coupling means comprise a tongue (8) and a groove (9), characterized in that the lip situated on the top side of the groove (9), hereafter called the upper lip (10), is longer than the lip situated on the bottom side of the groove (9), hereafter called the lower lip (11), and

in that the above-mentioned coupling means contain coupling parts which provide for the interlocking in the horizontal direction, and whereby these coupling means make it possible for said panels (2) to be mutually disconnected by rotating them with their bottom sides down and towards one another.

19. Floor covering consisting of hard panels (2), whereby these panels (2) are provided with coupling means on at least two opposite edges made in one piece with the panels (2), as a result of which several of such panels (2) can be mutually coupled to one another, whereby these coupling means provide for an interlocking in a direction perpendicular to the plane of the floor covering, as well as in a direction (R2) perpendicular to the edges concerned, and parallel to the plane of the floor covering, whereby said coupling means comprise a tongue and a groove, characterized in that the interlocking in the horizontal direction is formed of coupling parts in the shape of a local protrusion (39) in the top side of the above-mentioned tongue (8), which meshes in a recess in the lip (10) bordering the top side of the groove (9).
20. Floor covering according to claim 19, characterized in that the top side of the tongue (8), with the exception of the local protrusion (39), is mainly parallel to the surface of the floor covering (1).
21. Floor covering according to claim 19 or 20, characterized in that the bottom side of the tongue (8)

- 43 -

is mainly formed of a smoothly bent surface which reaches up to the top side of the tongue (8).

22. Floor covering consisting of hard panels (2), whereby
- 5 these panels (2) are provided with coupling means on at least two opposite edges made in one piece with the panels (2), as a result of which several of such panels (2) can be mutually coupled to one another, whereby these coupling means provide for an interlocking in a
- 10 direction (R1) perpendicular to the plane of the floor covering, as well as in a direction (R2) perpendicular to the edges concerned, and parallel to the plane of the floor covering, whereby:
- the above-mentioned coupling means comprise a tongue

15 (8) and a groove (9), whereby this groove (9) is bordered on the bottom side, the top side respectively, by a lip, hereafter called the lower lip (11) and the upper lip (10) respectively, whereby the distal end (12) of the upper lip (10) defines a

20 vertical plane, hereafter called plane V1;

  - the lower lip (11) is longer than the upper lip (10);
  - there is an interlocking part (13) on the part of the lower lip (11) which extends past the free end of the upper lip (10), with a contact surface which, when

25 coupled, works in conjunction with a contact surface which is provided on the other panel, whereby these contact surfaces form a contact zone when coupled, whose center defines a vertical plane, hereafter called plane V2;

  - before the above-mentioned interlocking part (13), in

30 the direction of the groove (9), is formed a space

- 44 -

(14) in the lower lip (11) which is open on the top side;

- in the coupled situation, there is a contact zone in the cross section in which the top side of the tongue (8) makes contact with the bottom side of the upper lip (10), whereby the point (C3) of this contact zone which is situated most inwardly defines a first vertical plane, hereafter called plane V3, the most outwardly situated point (C4) of this contact zone defines a second vertical plane, hereafter called plane V4, and both planes V3 and V4 define a vertical plane situated right in between, hereafter called plane V5;
- the top side of the interlocking part (13) defines a horizontal level, hereafter called level N1;
- the bottom side of the part (16) upon which the tongue (8) is provided and which extends from the tip (24) of the tongue (8) to the interlocking zone, defines a horizontal level, hereafter called level N2;
- the levels N1 and N2 define a horizontal level situated right in between, hereafter called level N3;
- the average height of the contact zone between the top side of the tongue (8) and the bottom side of the upper lip (10) define a horizontal level, hereafter called level N4;
- the distance between the planes V1 and V2 is at least half of the distance between the levels N3 and N4, characterized in that the floor covering further provides at least in the combination of the following characteristics:

- 45 -

- that the panels (2), and basically also the above-mentioned lips (10-11), are made of fiberboard of the type MDF or HDF;
- that the coupling means (43) are made such that the  
5 panels (2) can be assembled by pushing them towards one another; and
- that the above-mentioned space (14) extends to beneath the upper lip 10, such that this space (44) is in conformity with at least one of the following two  
10 characteristics:
  - a) that the part of this space (44) which is situated under the level N3 extends inwardly to at least past the plane V1;
  - b) that the part of this space (44) which is situated  
15 under the level N1 extends inwardly to at least past the plane V5.

23. Floor covering according to claim 22, characterized in that the distance between the levels N1 and N2 is  
20 smaller than  $1/3$  of the distance between the levels N2 and N4.

24. Floor covering according to claim 22 or 23, characterized in that the intersection (P4) between the  
25 plane V4 and the bottom side of the tongue (8) is situated beneath level N1, and better still beneath level N3.

25. Floor covering according to any of claims 22 to 24,  
30 characterized in that the section (P5) between the plane

- 46 -

V5 and the bottom side of the tongue (8) is situated beneath level N1, and better still beneath level N3.

26. Floor covering according to any of claims 22 to 25,  
5 characterized in that the section (P3) between the plane V3 and the bottom side of the tongue (8) is situated beneath level N1, and better still beneath level N3.

27. Floor covering according to any of claims 22 to 26,  
10 characterized in that the part of the above-mentioned space (44) situated under the plane N3 extends at least inwardly up to the vertical plane (V6) which is determined by the tip (24) of the tongue (8).

15 28. Floor covering according to any of claims 22 to 27, characterized in that the panels (2) are rectangular and in that coupling means are formed on both pairs of edges (3-4, 5-6) which allow for an interlocking both in the horizontal and vertical direction, whereby said coupling  
20 means (43) are formed as described above on at least one pair of these edges (3-4, 5-6), and whereby, at least on two edges (4,6) standing at right angles, use is made of a groove (9) which is bordered by an upper lip (10, 10A) and a lower lip (11, 11A) respectively, whereby the  
25 lower lip (11, 11A) each time extends further than the upper lip (10, 10A), such that two of such longer lips meet in at least one angle (45) of the panel (2), whereby at least the above-mentioned space (44)  
continues up to the end of the panel (2) in said angle  
30 (45), in other words extends through the far end of the lip (11A) standing at right angles.

29. Floor covering consisting of hard panels (2), whereby these panels (2) are provided with coupling means on at least two opposite edges made in one piece with the panels, as a result of which several of such panels (2) can be mutually coupled to one another, whereby these coupling means provide for an interlocking in a direction (R1) perpendicular to the plane of the floor covering (1), as well as in a direction (R2) perpendicular to the edges concerned, and parallel to the plane of the floor covering (1), and whereby:
- the above-mentioned coupling means comprise a tongue (8) and a groove (9), whereby this groove (9) is bordered by a lip on the bottom side, the top side respectively, hereafter called the lower lip (11) and the upper lip (10) respectively;
  - the lower lip (11) is longer than the upper lip (10);
  - there is an interlocking part on the part of the lower lip (11) which extends past the free end (12) of the upper lip (10), with a contact surface which, when coupled, works in conjunction with a contact surface which is provided on the other panel (2);
  - before the above-mentioned interlocking part, in the direction of the groove (9), is formed a space in the lower lip (11) which is open on the top side;
- characterized in that the coupling means are made such that the panels (2) can be assembled by pushing them towards one another, and in that in the bottom side of the part onto which the tongue (8) is provided, and which extends from the tip (24) of the tongue (8) up to the interlocking zone, is provided an excavation, such



that this excavation co-operates with the interlocking part in a position in which the tongue (8) is situated in front of the groove (9).

5 30. Floor covering according to any of the preceding claims, characterized in that the coupling means are made such that the panels (2) can be assembled by means of a mainly horizontal movement.

10 31. Floor covering according to claim 30, characterized in that the tongue (8) and the groove (9) are made such that when two such panels (2) are freely pushed towards one another, over a base or such, the tongue (8) automatically ends up in the groove (9).

15 32. Floor covering according to any of the preceding claims, characterized in that the panels (2) are rectangular and in that they are provided with coupling means on four edges which allow for a vertical and a horizontal :  
20 interlocking, whereby at least two opposite edges are provided with coupling means, as described in any of the preceding claims.

25 33. Floor covering according to claim 32, characterized in that the panels (2) are longitudinal, and in that the coupling means described in any of claims 1 to 21, are provided at least on the short sides.

30 34. Floor covering according to any of the preceding claims, characterized in that the above-mentioned coupling means, described in any of claims 1 to 21, are made such

- 49 -

that they can be turned in and/or out of one another by means of a movement of rotation.

35. Floor covering according to any of the preceding claims,  
5 characterized in that the coupling means (7, 25, 26, 31, 43) comprise coupling parts which provide for the interlocking in the horizontal direction (R2), by means of contact surfaces (14-15) which work in conjunction with one another, characterized in that these contact  
10 surfaces (14-15) extend in a direction (B1) which is tangential or almost tangential to a circle (C), whose center is situated on a point of rotation around which the panels (2) can be turned apart.

15 36. Floor covering according to claim 35, characterized in that the contact surfaces (14-15) deviate slightly from the above-mentioned tangential direction (B2) and are directed inwardly, such that a snap-in effect is created when the panels are rotated into one another, whereby  
20 the above-mentioned direction (B1) of the contact surfaces (14-15) deviates 30° at the most from the above-mentioned tangential direction (B2).

37. Floor covering consisting of hard panels (2), whereby  
25 these panels (2) are provided with coupling means (7) on at least two opposite edges (3-4, 5-6) made in one piece with the panels (2), as a result of which several of such panels (2) can be mutually coupled to one another, whereby these coupling means (7) provide for an  
30 interlocking in a direction (R1) perpendicular to the plane of the floor covering (1), as well as in a

- 50 -

direction (R2) perpendicular to the edges (3-4, 5-6) concerned, and parallel to the plane of the floor covering (1), characterized in that the above-mentioned coupling means (7) are made such that two coupled panels (2), starting from a flat position, can be turned towards one another with their bottom sides over at least a certain angle on the one hand, and this turning movement makes it possible for said two panels (2) to be removed from in between adjacent panels (2) on the other hand.

38. Floor covering according to claim 37, characterized in that the coupling means (7) are made such that they make it possible for the two panels (2) to be lifted with their coupled edges from a flat position, such that there is a disconnection on at least one of the opposite edges providing for a connection with the adjacent panels (2).

39. Floor covering according to any of claims 37 or 38, characterized in that the coupling means (7) are made such that they make it possible for the two panels (2) to be lifted with their coupled edges from a flat position, such that the coupling, in particular the vertical coupling, is interrupted on the edges concerned.

40. Floor covering according to any of claims 37 to 39, characterized in that the coupling means (7) mainly consist of a tongue (8) and a groove (9), whereby the lip (11) which is situated on the bottom side of the

- 51 -

groove (9) is longer than the lip (10) on the top side, and the interlocking is obtained mainly in the horizontal direction thanks to an interlocking part (13) on the lip (11) situated on the bottom side of the groove (9) and an interlocking part (47) working in conjunction with it on the bottom side of the other panel (2), whereby these coupling means (7) make it possible for the panels (2) to be assembled by means of a turning movement and whereby, in the coupled position, spaces (48-49) are provided above the first-mentioned interlocking part (13) as well as under the second-mentioned interlocking part (47) which allow for a further turning.

41. Floor covering according to any of claims 37 to 40; characterized in that the above-mentioned interlocking parts (13-47) are positioned such that a lateral play (S) is created during the above-mentioned further turning.

42. Floor covering according to claim 41, characterized in that the lateral play (S), as well as the design of the tongue (8) and the groove (9), are selected such that the panel (2), whose tongue (8) belongs to the above-mentioned coupling means (7), comes mainly loose on the edge where this tongue (8) is provided.

43. Floor covering according to claim 42, characterized in that the distance (Z1) between the tip (24) of the tongue (8) and the interlocking part (47) situated on the same edge is smaller than or equal to the distance

(22) between the tip (24) of the lip (10) bordering the top side of the groove (9) and the interlocking part (13) situated on the lip (11) bordering the bottom side of the groove (9).

5

44. Floor covering according to any of claims 37 to 43, characterized in that the tongue (8) is preferably made such that it can make a movement of rotation in the groove (9).


10

45. Floor covering, characterized in that it consists of hard panels (2) which combine the characteristics of two or several of the preceding claims.


15

46. Panel, characterized in that it has the characteristics as described in the preceding claims, and which thus makes it possible to realize a floor covering (1) according to any of these claims.


1/10

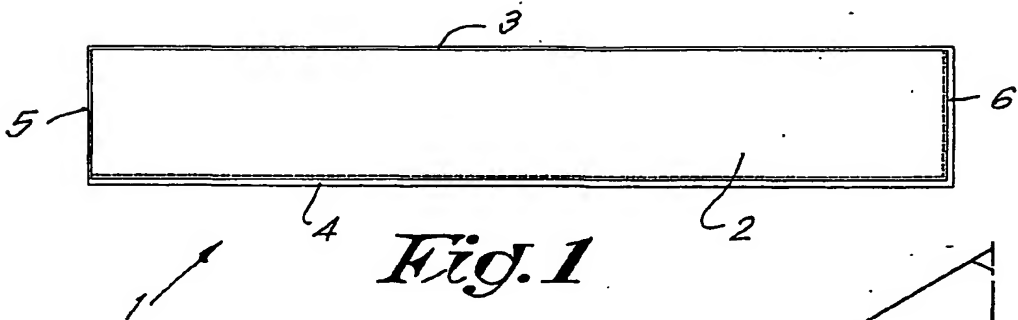


*Fig. 1*

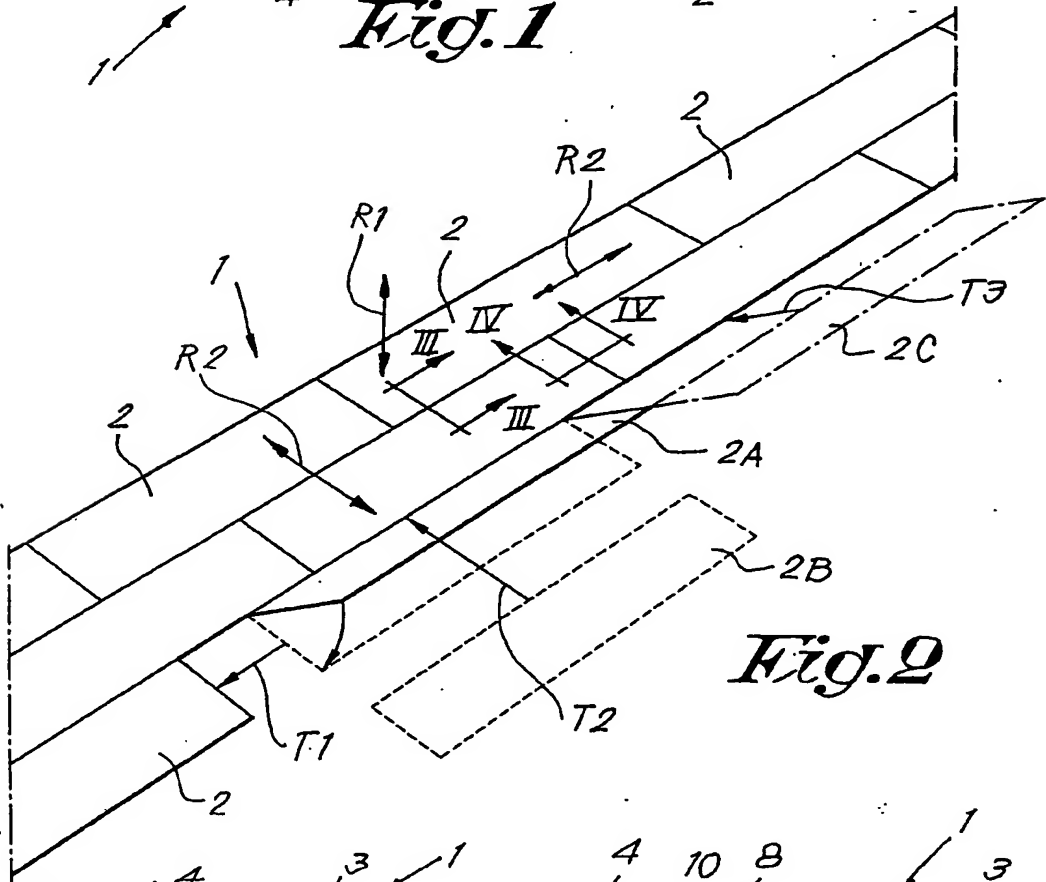

*Fig. 2*

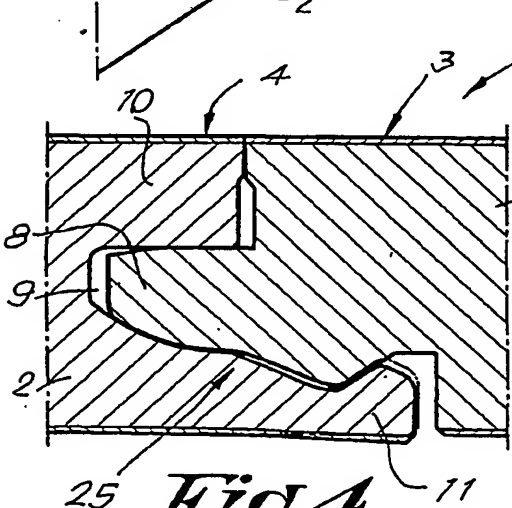

*Fig. 4*

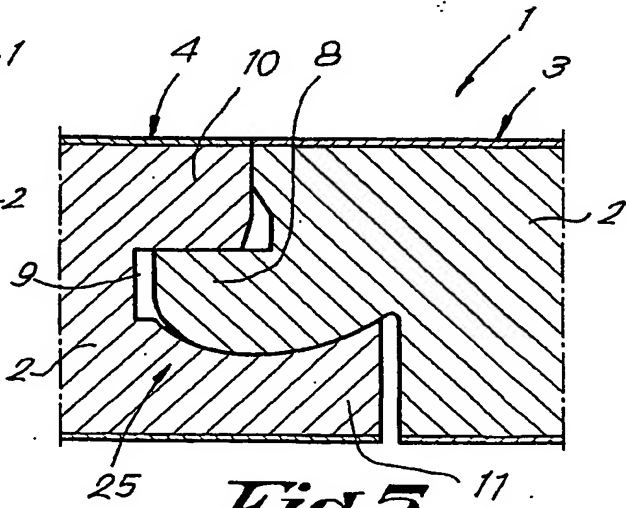

*Fig. 5*










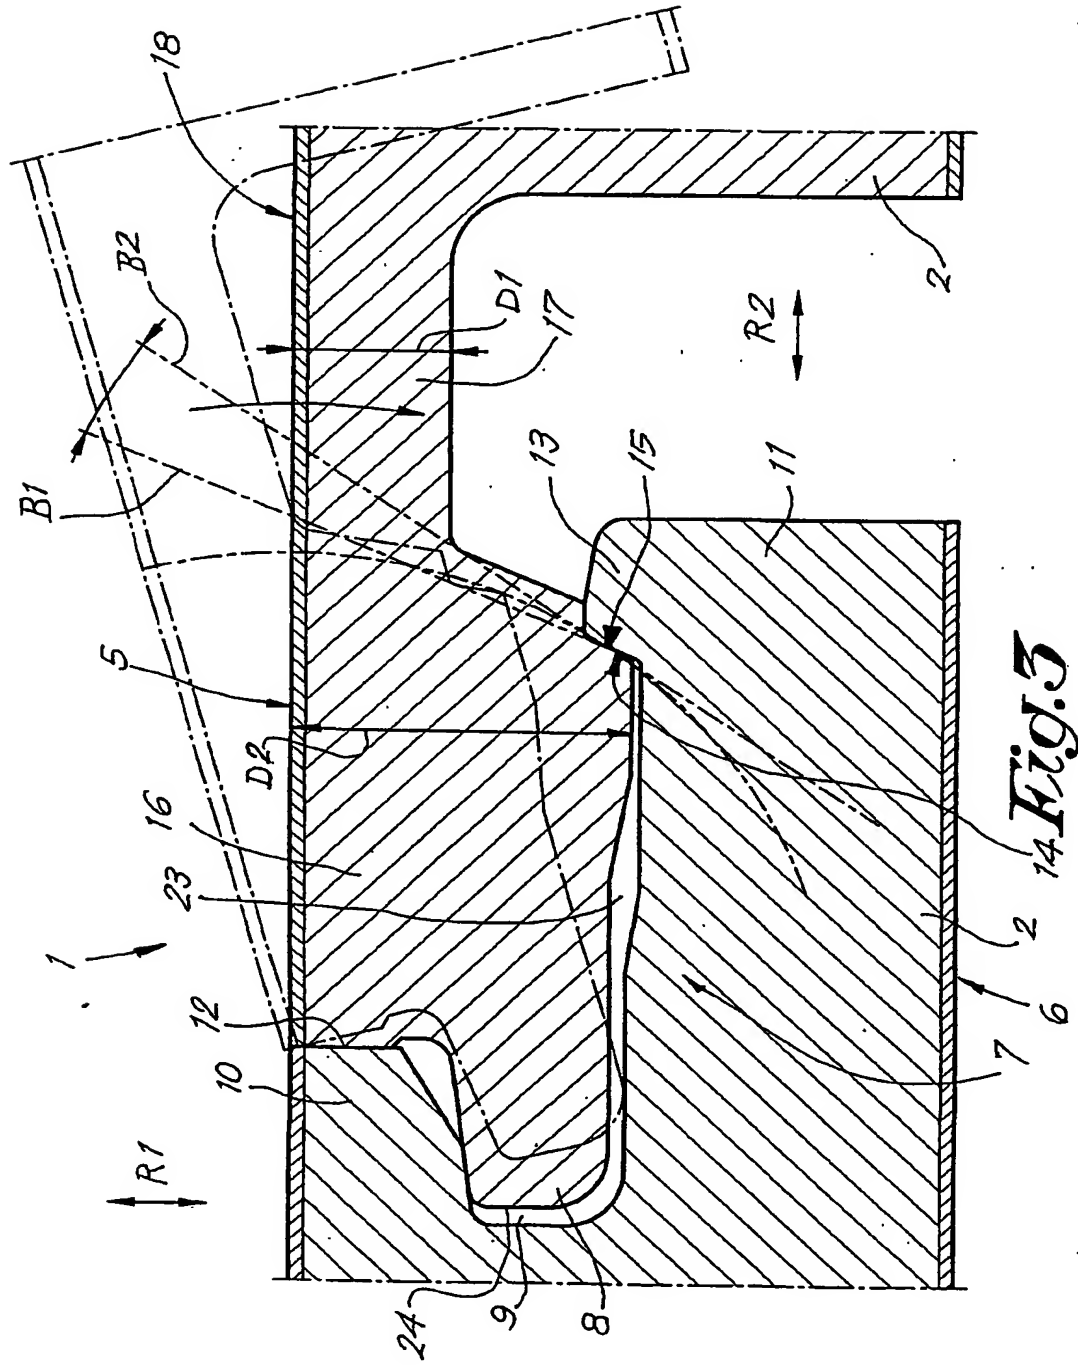



Fig. 3


*Fig. 6**Fig. 7**Fig. 8*

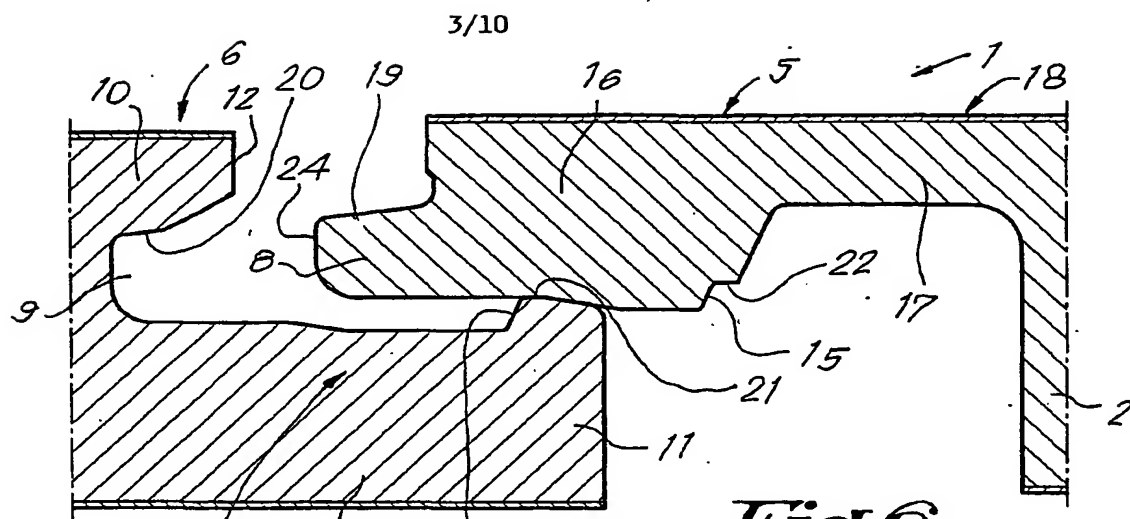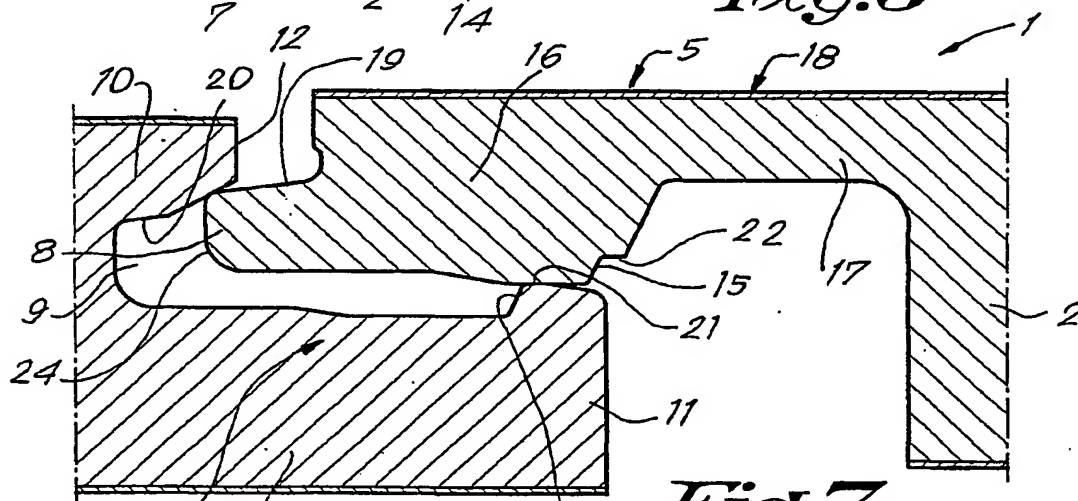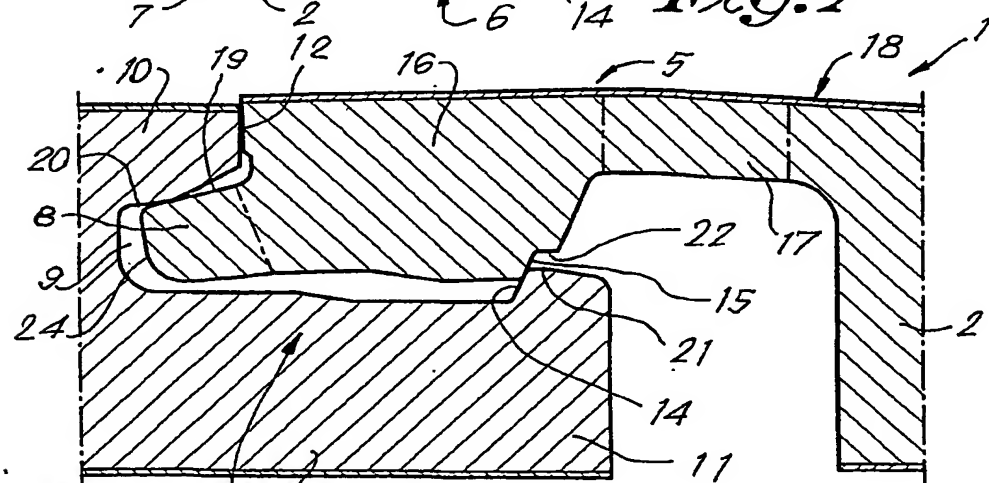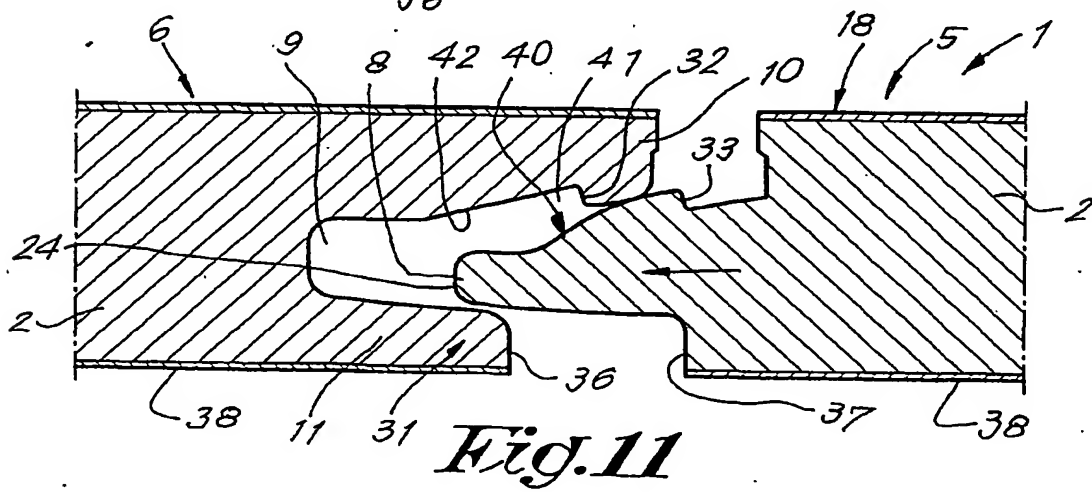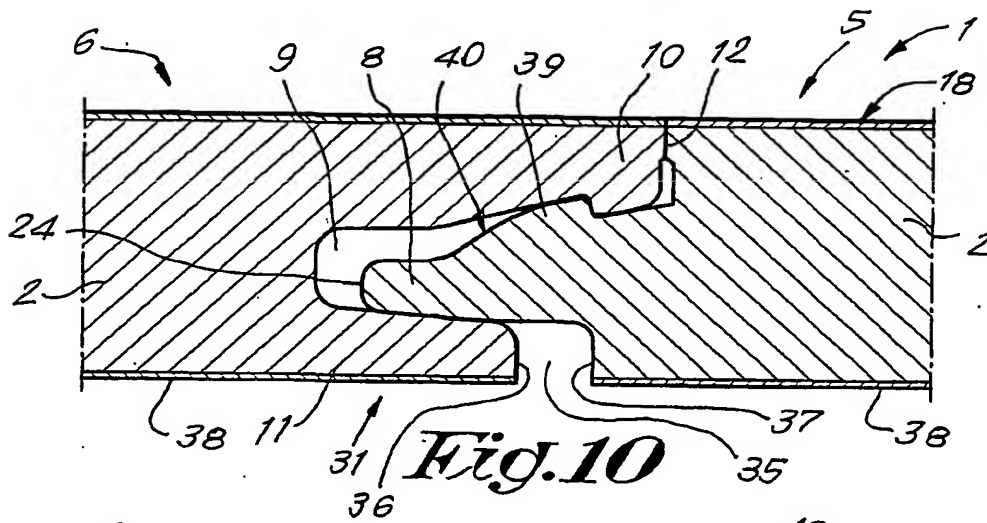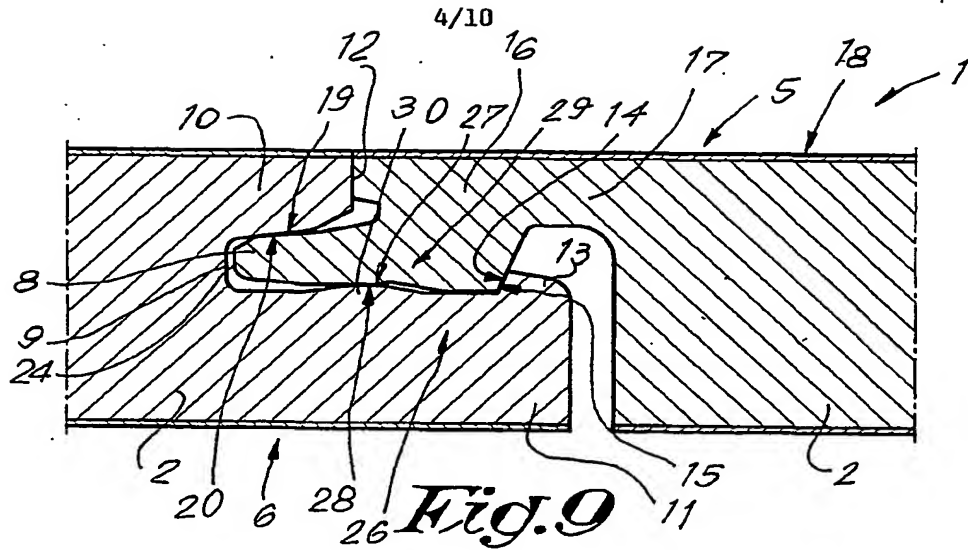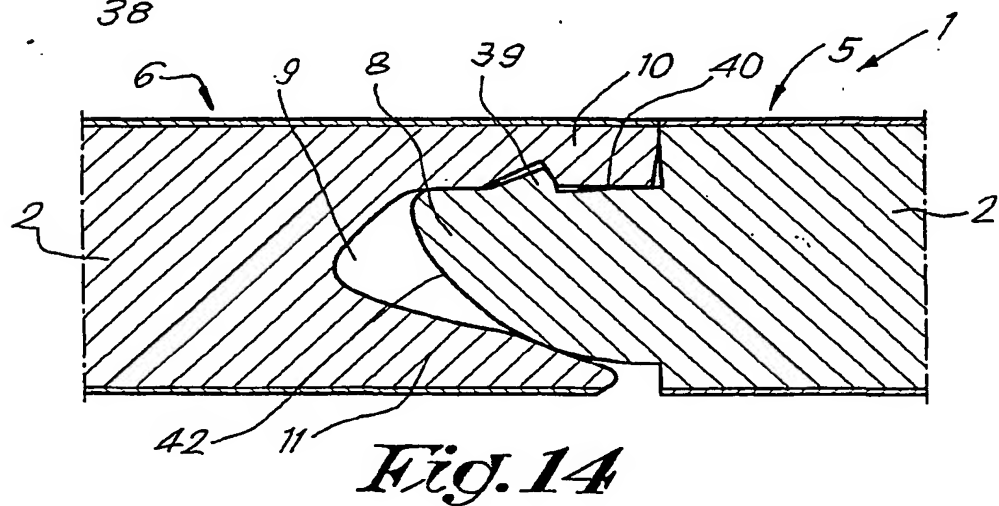

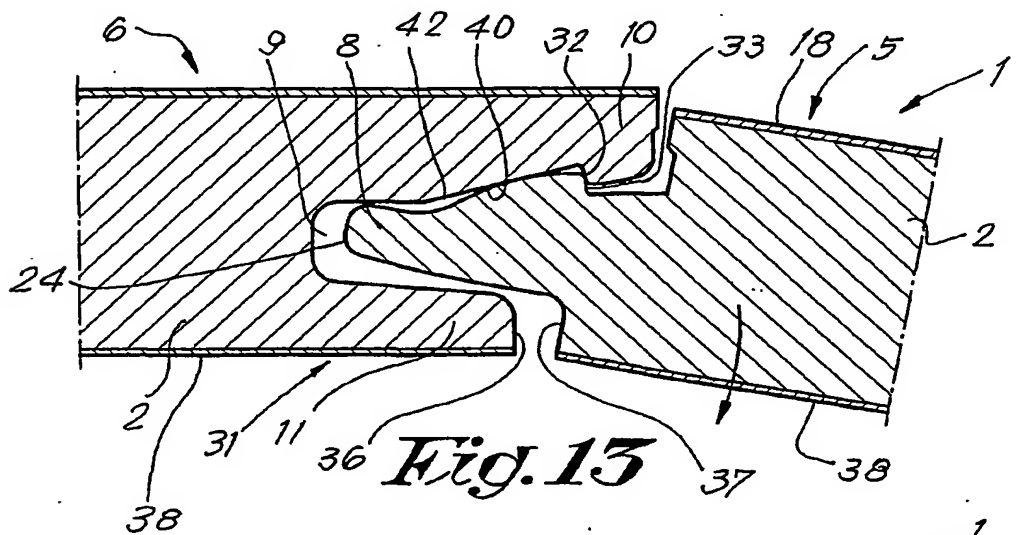


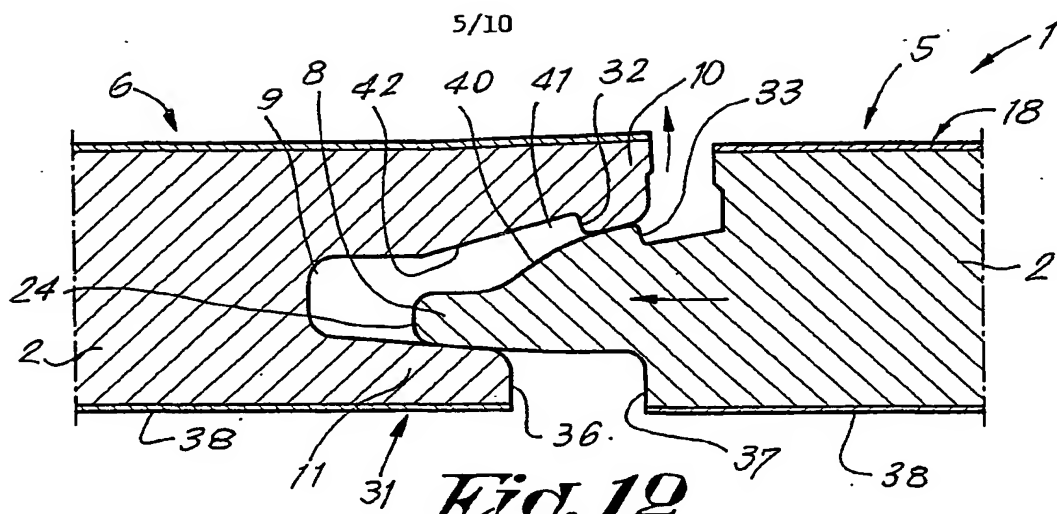

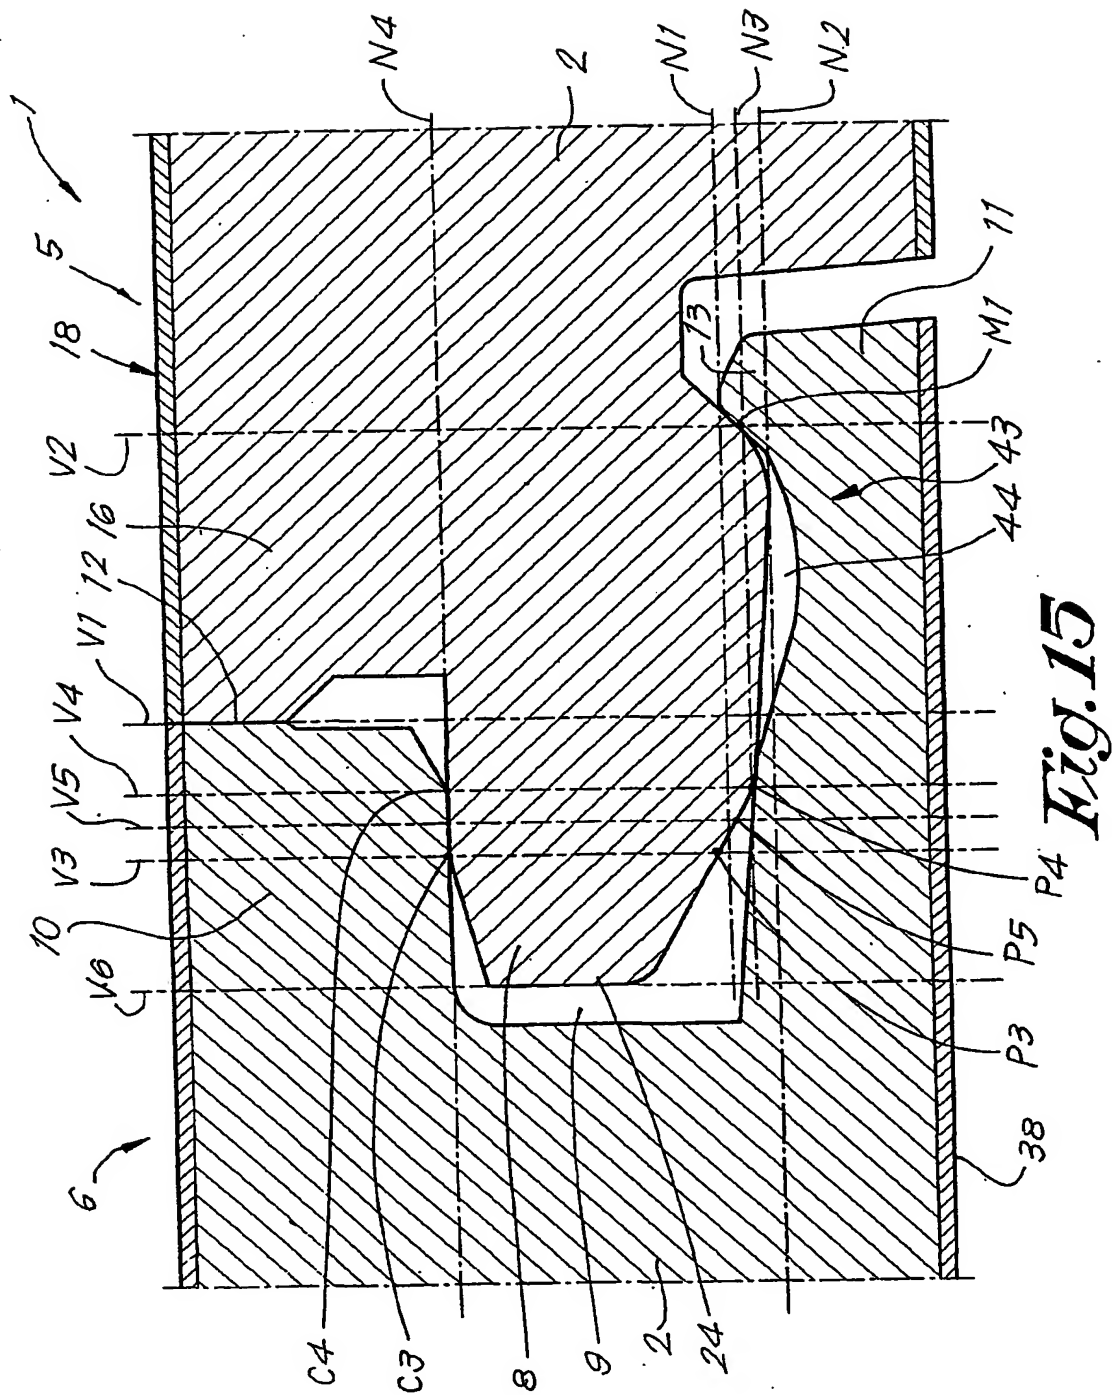


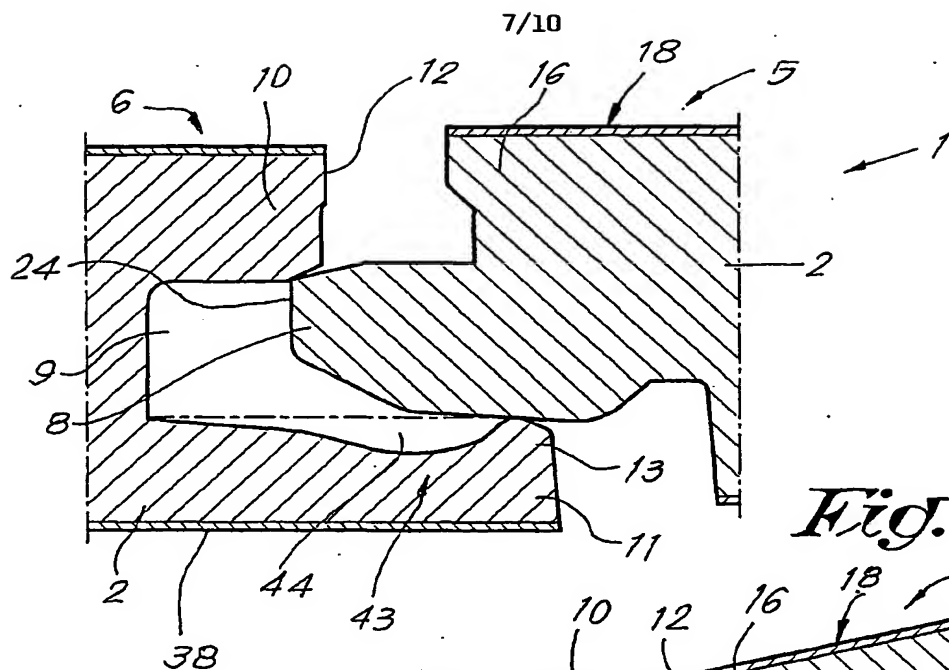

**Fig. 16**


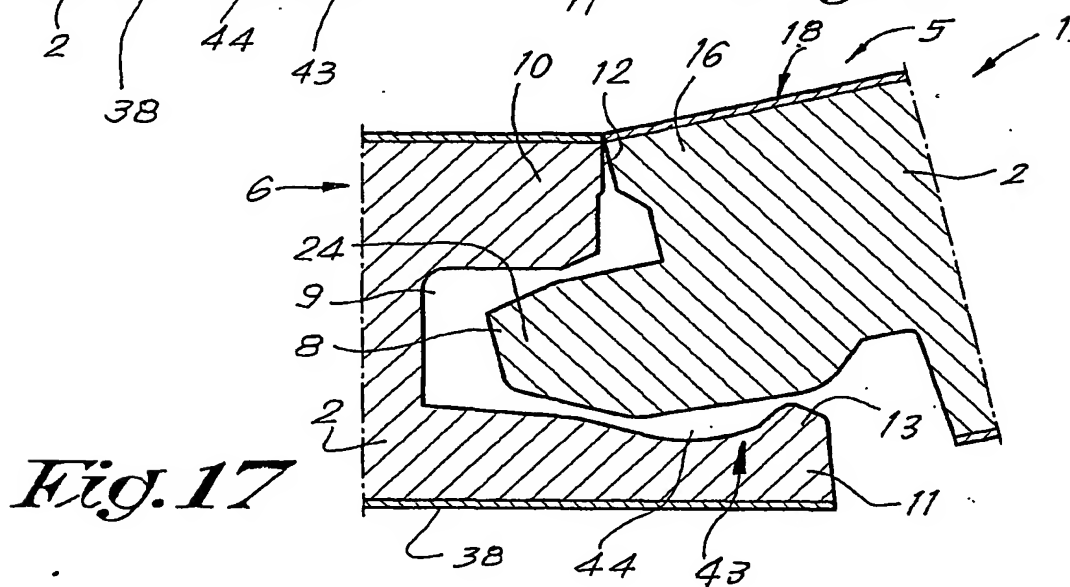




**Fig. 17**

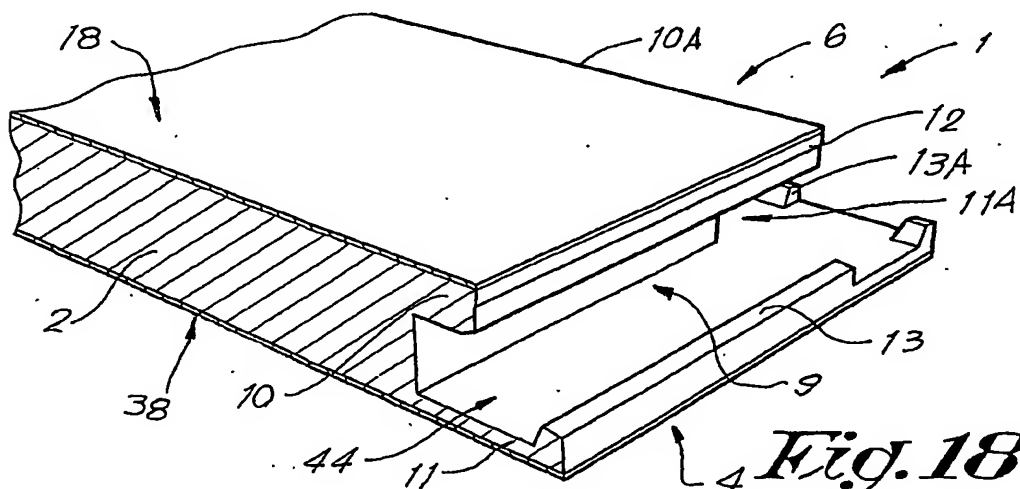

**Fig. 18**

8/10

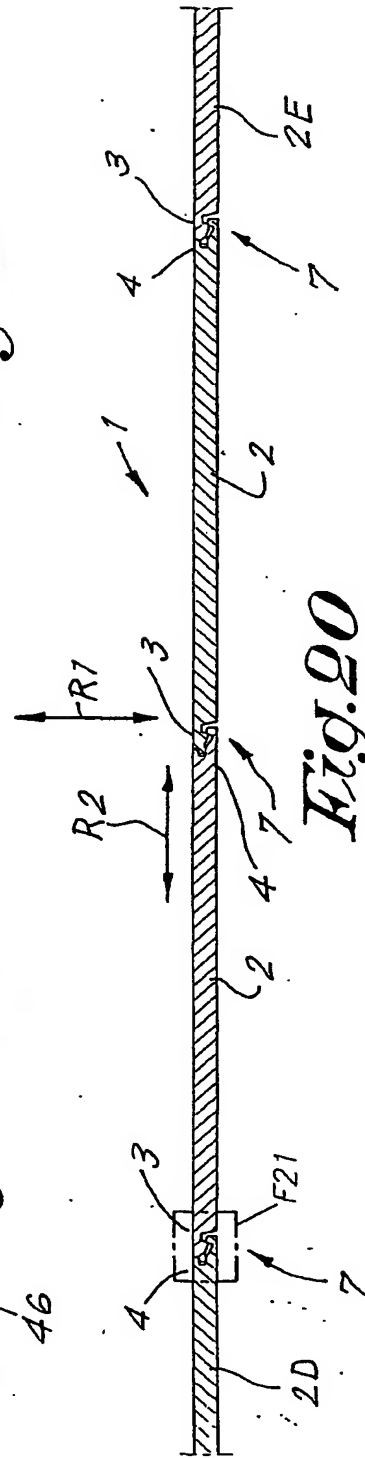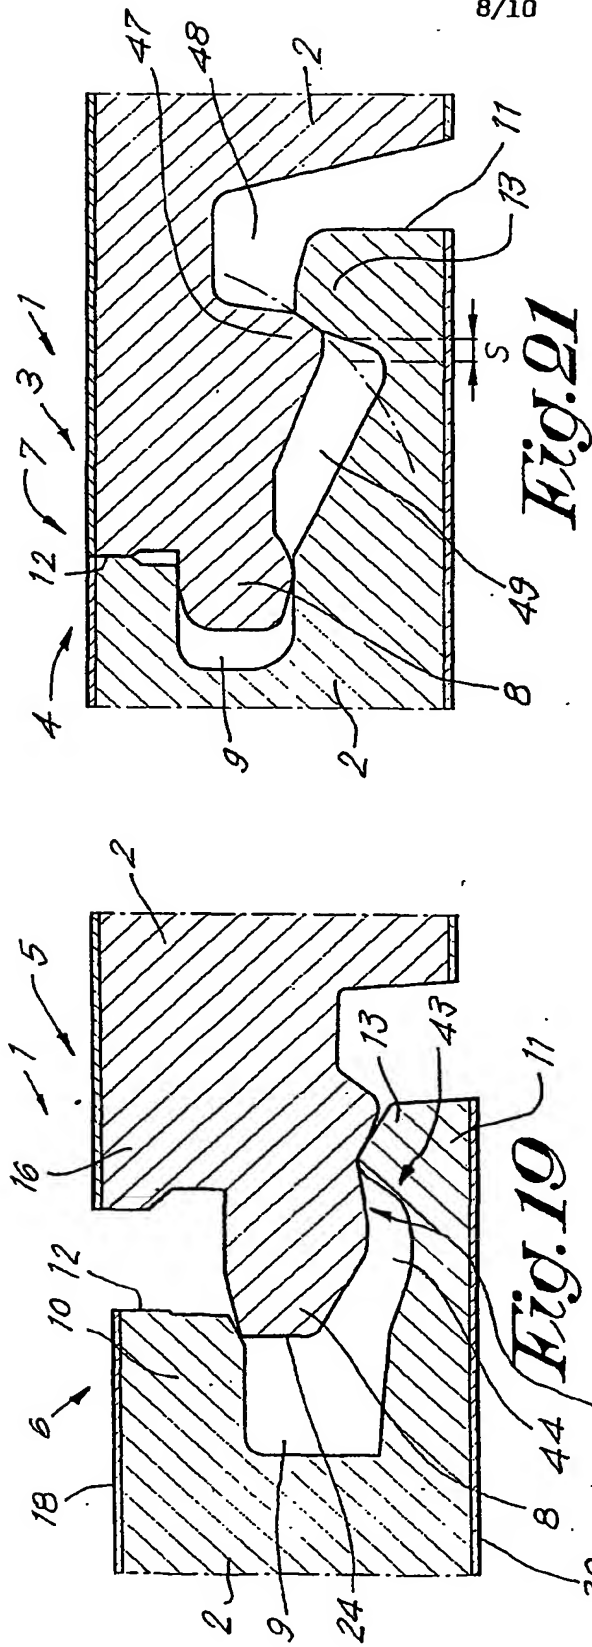

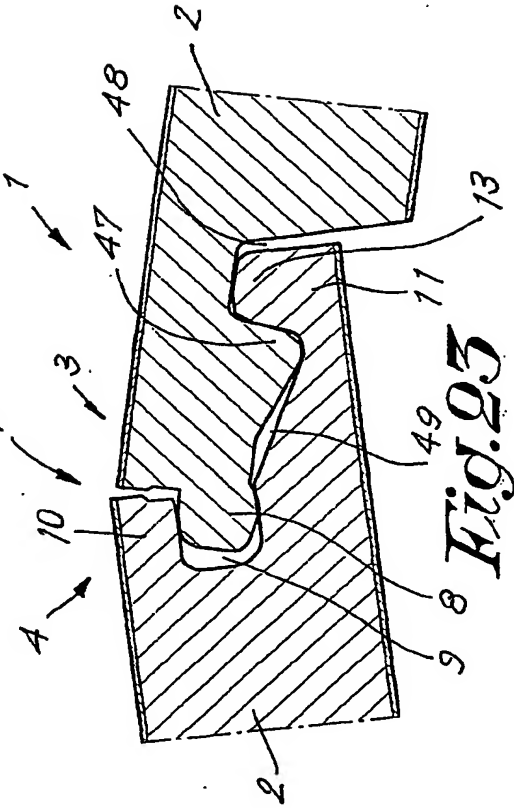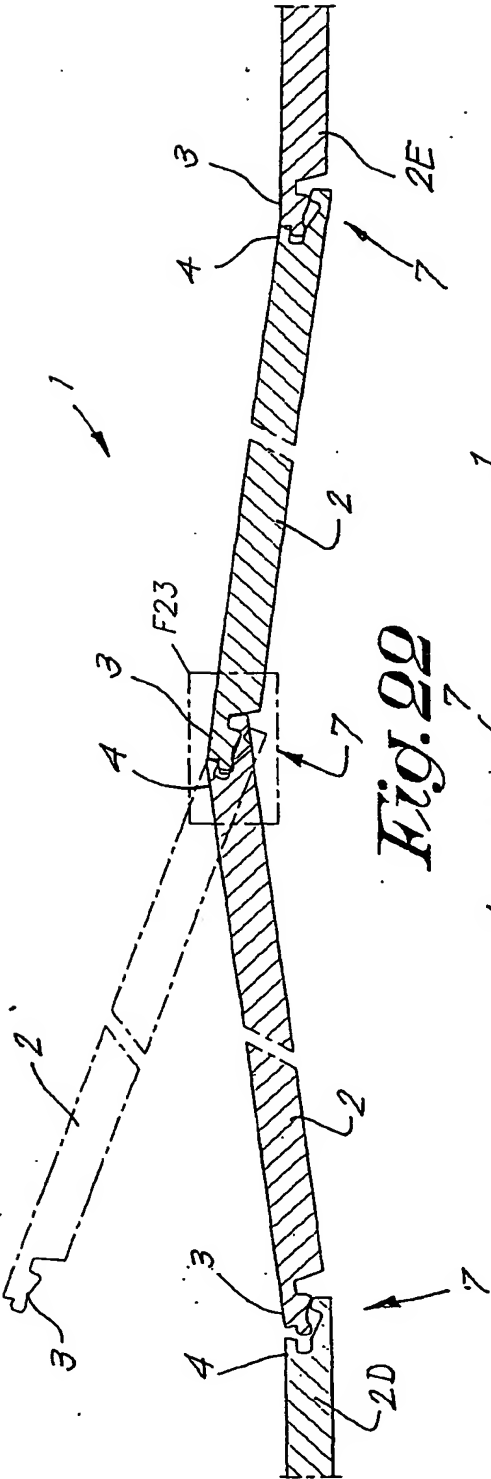

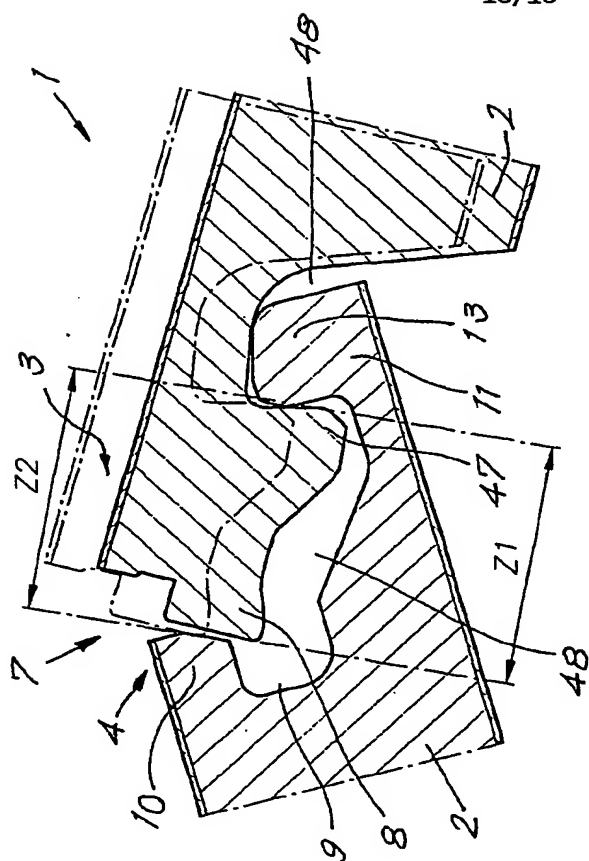


Fig. 624

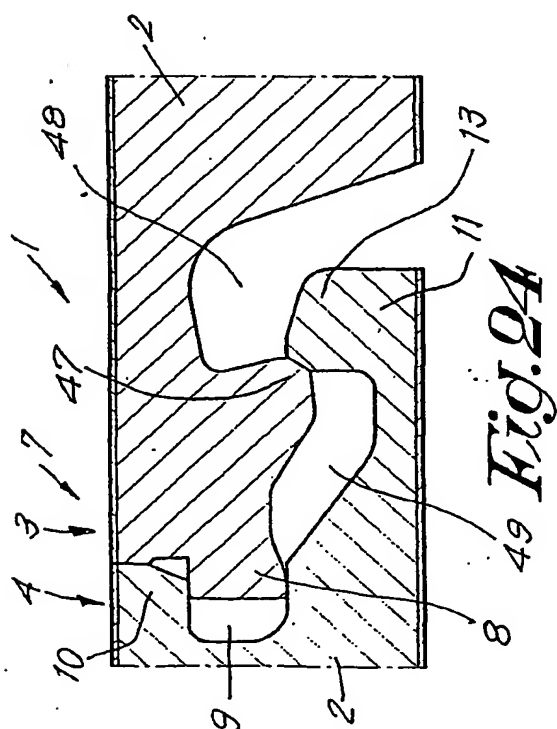


Fig. 04

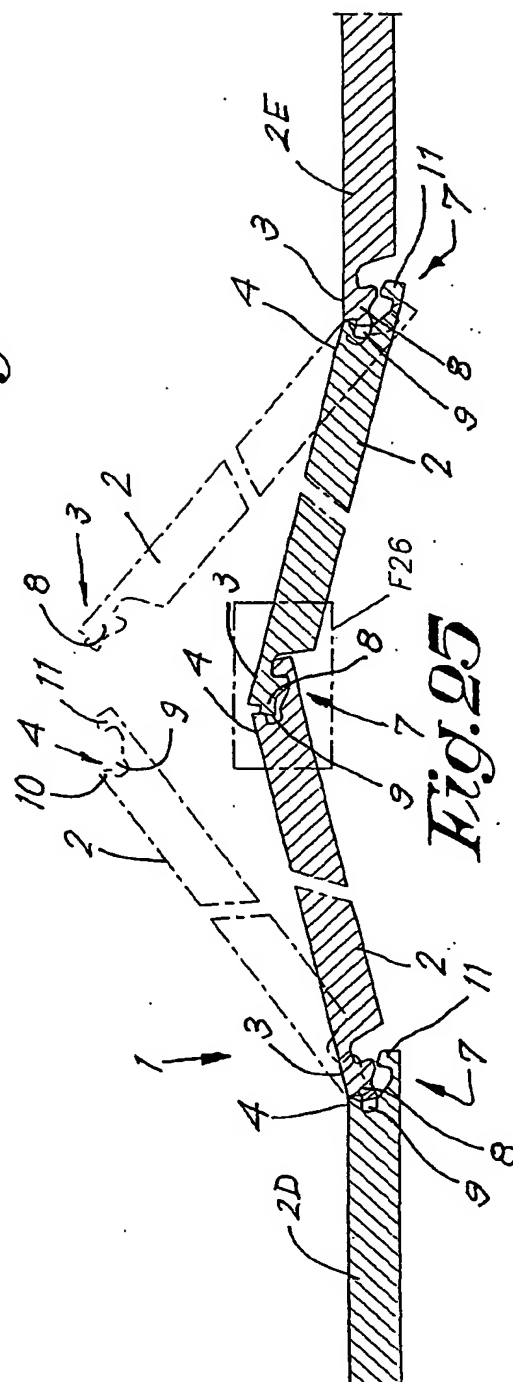


Fig. 5

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
27 December 2001 (27.12.2001)

PCT

(10) International Publication Number  
**WO 01/98603 A3**

(51) International Patent Classification<sup>7</sup>: **E04F 15/04**  
(21) International Application Number: **PCT/EP01/07022**  
(22) International Filing Date: **20 June 2001 (20.06.2001)**  
(25) Filing Language: **English**  
(26) Publication Language: **English**  
(30) Priority Data:  
2000/0397 20 June 2000 (20.06.2000) **BE**  
(71) Applicant: **UNILIN BEHEER B.V., BESLOTEN VEN-  
NOOTSCHAP [NL/NL];** Hoogeveenweg 28, NL-2913  
LV Nieuwerkerk A/D IJssel (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DE (utility model), DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report


(88) Date of publication of the international search report:  
10 May 2002

(72) Inventors: **THIERS, Bernard, Paul, Joseph;** Station-  
straat 134, B-8780 Oostrozebeke (BE). **CAPPELLE,**  
**Mark, Gaston, Maurits;** Cardijnlaan (STA) 8, B-8840  
Staden (BE).

(74) Agent: **DONNE, E.;** Bureau M.F.J. Bockstael NV., Aren-  
bergstraat 13, B-2000 Antwerpen (BE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **FLOOR COVERING**

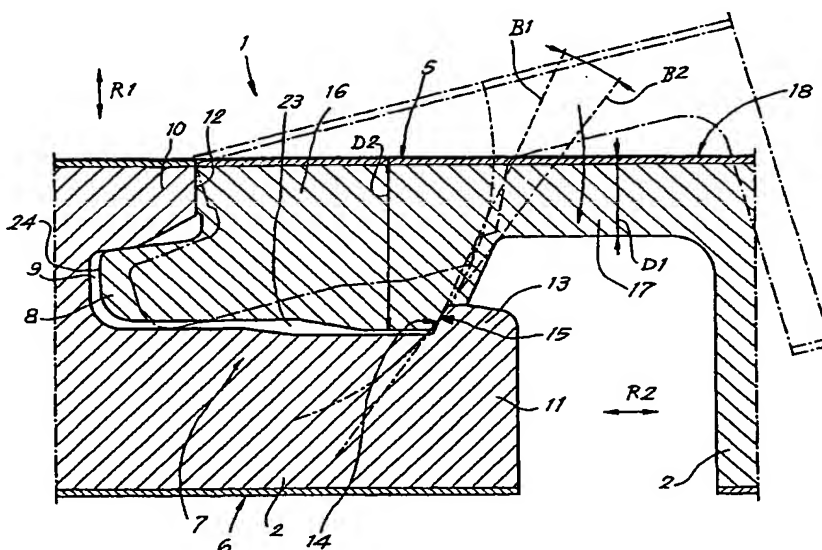

(57) Abstract: The invention concerns a floor covering consisting of hard panels (2) which are provided, at least on two opposite edges (3-4, 5-6), with coupling means (7) made in one piece with the panels (2), whereby these coupling means (7) provide for an interlocking in a direction (R1) perpendicular to the plane of the floor covering (1), as well as in a direction (R2) perpendicular to the edges (3-4, 5-6) concerned and parallel to the plane of the floor covering (1). These coupling means (7) comprise a tongue (8) and a groove (9). The lip (11) which is situated on the bottom side of the groove (9) is longer than the lip (10) on the top side. The edge (5) which is provided with the tongue (8) is made flexible.

WO 01/98603 A3



# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 01/07022

|  |  |  |
|--|--|--|
| <b>A. CLASSIFICATION OF SUBJECT MATTER</b><br>IPC 7 E04F15/04  |  |  |
| According to International Patent Classification (IPC) or to both national classification and IPC  |  |  |
| <b>B. FIELDS SEARCHED</b><br>Minimum documentation searched (classification system followed by classification symbols)<br>IPC 7 E04F   |  |  |
| Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  |  |  |
| Electronic data base consulted during the international search (name of data base and, where practical, search terms used)<br>EP0-Internal, WPI Data, PAJ  |  |  |
| <b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>  |  |  |
| Category *   | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No.  |
| A  | WO 97 47834 A (UNILIN BEHEER BV)<br>18 December 1997 (1997-12-18)<br>cited in the application<br>page 9, line 26 -page 28, line 3; figures<br>1-25 | 1,8,<br>30-36,<br>45,46  |
| P,X  | DE 200 05 877 U (KUNNEMEYER HORNITEX)<br>26 October 2000 (2000-10-26)<br><br>page 3, line 70 -page 5, line 180; figures<br>1-6                     | 1,3,<br>30-34,<br>45,46  |
| <div style="display: flex; justify-content: space-between;"> <span><input type="checkbox"/> Further documents are listed in the continuation of box C.</span> <span><input checked="" type="checkbox"/> Patent family members are listed in annex.</span> </div>   |  |  |
| <div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&amp;" document member of the same patent family</p> </div> </div> |  |  |
| Date of the actual completion of the international search<br><br><div style="text-align: center;">23 October 2001</div>  |  | Date of mailing of the international search report<br><br><div style="text-align: center;">- 4 02 2002</div> |
| Name and mailing address of the ISA<br>European Patent Office, P.B. 5818 Patentlaan 2<br>NL - 2280 HV Rijswijk<br>Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,<br>Fax: (+31-70) 340-3016   |  | Authorized officer<br><br><div style="text-align: center;">AYITER, J</div>                                   |

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/EP 01/07022

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:  
1-8, 30-36, 45, 46

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.  
☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-8,30-36,45,46

Laminate panels with tongue and groove connections comprising, a groove with a rigid lower lip and a flexible tongue engaging this groove

2. Claims: 9-12,30-36,45,46

Laminate panels with tongue and groove connections comprising, three different coupling parts divided on the two opposit edges of the connection

3. Claims: 13,14,30-36,45,46

Laminate panels with tongue and groove connections comprising, a local contact zone in a middle part between the tip of the tongue and a third coupling part on the lower lip placed on the side opposit to the tip

4. Claims: 15-17,30-36,45,46

Laminate panels with tongue and groove connections comprising, a groove with two lips of different lengths, the longer upper lip being provided with an interlocking part which is situated outside the distal-end of the shorter lower lip

5. Claims: 18,30-36,45,46

Laminate panels with tongue and groove connections comprising, a groove with two lips of different lengths, a longer upper lip and a shorter lower lip, the upper side of the upper lip comprising coupling parts which are interlocking the panels in the horizontal direction and providing that the panels can be disconnected by turning them down with their bottom side and towards one another

6. Claims: 19-21,30-36,45,46

Laminate panels with tongue and groove connections comprising, a groove with an upper and a lower lip, which upper lip comprises a local recess on its lower side and which tongue comprises a protrusion on its upper side engaging this recess

7. Claims: 22-28,30-36,45,46

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Laminate panels with tongue and groove connections comprising, a groove with two lips of different lengths and the longer lower lip comprising a large open space on its upper side underneath the tongue

8. Claims: 29,30-36,45,46

Laminate panels with tongue and groove connections comprising, a groove with two lips of different lengths, the lower lip which is longer than the upper-one, comprising interlocking parts extending past the free end of the upper lip and the interlocking zone being provided with an excavation cooperating with the tongue when it is in front of the groove

9. Claims: 37-44,30-36,45,46

Laminate panels with tongue and groove connections comprising, coupling means interlocking in the two directions, perpendicular to the plane of the floor as well as perpendicular to the edges concerned, providing the jointing and removal of any single panel by a movement of rotation due to a lateral play provided in-between these interlocking parts

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/07022

| Patent document<br>cited in search report |   | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---|---------------------|----------------------------|---------------------|
| WO 9747834                                | A | 18-12-1997          | BE 1010339 A3              | 02-06-1998          |
|   |   |                     | BE 1010487 A6              | 06-10-1998          |
|   |   |                     | AT 196790 T                | 15-10-2000          |
|   |   |                     | AU 713628 B2               | 09-12-1999          |
|   |   |                     | AU 3256997 A               | 07-01-1998          |
|   |   |                     | BG 62216 B1                | 31-05-1999          |
|   |   |                     | BG 102230 A                | 30-09-1998          |
|   |   |                     | BR 9702325 A               | 09-03-1999          |
|   |   |                     | CA 2226286 A1              | 18-12-1997          |
|   |   |                     | CN 1195386 A               | 07-10-1998          |
|   |   |                     | CZ 9800391 A3              | 12-08-1998          |
|   |   |                     | DE 1026341 T1              | 05-07-2001          |
|   |   |                     | DE 1024234 T1              | 06-09-2001          |
|   |   |                     | DE 29710175 U1             | 14-08-1997          |
|   |   |                     | DE 29724428 U1             | 05-04-2001          |
|   |   |                     | DE 69703230 D1             | 09-11-2000          |
|   |   |                     | DE 69703230 T2             | 01-03-2001          |
|   |   |                     | DK 843763 T3               | 29-01-2001          |
|   |   |                     | EG 21186 A                 | 31-12-2000          |
|   |   |                     | WO 9747834 A1              | 18-12-1997          |
|   |   |                     | EP 1026341 A2              | 09-08-2000          |
|   |   |                     | EP 1024234 A2              | 02-08-2000          |
|   |   |                     | EP 0843763 A1              | 27-05-1998          |
|   |   |                     | ES 2153799 T1              | 16-03-2001          |
|   |   |                     | ES 2153800 T1              | 16-03-2001          |
|   |   |                     | ES 2152679 T3              | 01-02-2001          |
|   |   |                     | HU 9901996 A2              | 28-10-1999          |
|   |   |                     | JP 11510869 T              | 21-09-1999          |
|   |   |                     | NO 980569 A                | 10-02-1998          |
|   |   |                     | PL 324923 A1               | 22-06-1998          |
|   |   |                     | PT 843763 T                | 30-03-2001          |
|   |   |                     | SI 9720009 A               | 31-08-1998          |
|   |   |                     | SK 16398 A3                | 09-09-1998          |
|   |   |                     | TR 9800209 T1              | 22-06-1998          |
|   |   |                     | US 6006486 A               | 28-12-1999          |
|   |   |                     | ZA 9705060 A               | 16-04-1998          |
| -----                                     |   |                     |                            |                     |
| DE 20005877                               | U | 26-10-2000          | DE 10013684 A1             | 04-10-2001          |
|   |   |                     | DE 20005877 U1             | 26-10-2000          |
| -----                                     |   |                     |                            |                     |

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**